



2015

wiha 
Tools that work for you

Professional ESD Safe Tools



Complete ESD Safe Program





What is ESD?

Basic Concepts in Electrostatic Discharge (ESD)

We have all seen static electricity in the form of lightning or perhaps felt the zap when reaching for a door knob. Similar types of electrical charges can have an effect on the electronic components you handle every day in your work. Unfortunately, their effect is much more hazardous and not as readily apparent.

Definition

Static electricity is an electrical charge at rest. Static electricity is most commonly created by friction and separation. Friction causes heat which excites the molecular particles of the material. When two materials are then separated, a transfer of electrons from one material to the other may take place.

As electrons transfer, the absence or surplus of electrons creates an electrical field known as static electricity. The simple separation of two materials, as when tape is pulled off a roll, can also create this same transfer of electrons between materials, generating static electrical fields.

The amount of static electricity generated depends upon the materials subjected to friction or separation, the amount of friction or separation and the relative humidity of the environment. Common plastic generally will create the greatest static charge. Low humidity conditions such as those created when air is heated during the winter will also promote the generation of significant static electrical charges.

Materials that easily transfer electrons (or charge) between atoms are called conductors and are said to have "free" electrons. Some examples of conductors are metals, carbon and the human body's sweat layer. Materials that do not easily transfer electrons are called insulators. Some well known insulators are common plastics, glass and air. Both conductors and insulators may become "charged" with static electricity. When a conductor is charged, the free electrons give it the ability to discharge rapidly when it comes close to another conductor with a different potential.

Typical Electrostatic Voltages

Many of the common activities you perform daily may generate charges on your body that are potentially harmful to components.

Some of these activities include:

- Walking across a carpet, 1,500 to 35,000 volts
- Walking over untreated vinyl floor, 250 to 12,000 volts
- Worker at a bench, 700 to 6,000 volts
- Vinyl envelope used for work instructions, 600 to 7,000 volts
- Picking up a common plastic bag from a bench, 1,200 to 20,000 volts

Costly Effects of ESD

When you feel a static shock, you are experiencing a minimum of 3,000 volts of electricity.

This "shock" known as Electro Static Discharge or ESD also may be responsible for damaging many of the rejected electronic components in your company.

While you can feel electrostatic discharges of 3,000 volts, smaller charges are below the threshold of human sensation. Unfortunately, smaller charges can and do damage semiconductor devices. Many of the CMOS technology components used in your facility can be damaged by charges of less than 1,000 volts. Some of the more sophisticated components can be damaged by charges as low as 10 volts. You should be aware of the relative sensitivity to ESD damage of devices you may be working with.

As electronic technology advances, electronic components tend to become smaller and smaller. As the size of the components is reduced, so is the microscopic spacing of insulators and circuits within them, increasing their sensitivity to ESD. As you can predict, the need of proper ESD protection increases everyday.

Types of ESD Damage

Static damage to components can take the form of upset failures or catastrophic failures.

- Upset failures - result in gate leakage
- Catastrophic failures - occur in two forms, Direct and Latent

Direct catastrophic failures occur when a component is damaged to the point where it is DEAD NOW and it will never again function. This is the easiest type of ESD damage to find since it usually can be detected during testing.

Latent failures occur when ESD weakens or wounds the component to the point where it will still function properly during testing, but over time the wounded component will cause poor system performance and eventually complete system failure. Because latent failures occur after final inspection or in the hands of your customer, the cost for repair is very high. Not only is this type of damage hard to find, but it severely affects the reputation of your company's product.

An upset failure occurs when an electrostatic discharge has caused a current flow that is not significant enough to cause total failure, but in use may intermittently result in gate leakage causing loss of software or incorrect storage of information.

Upset or latent failures may pass your company's quality control testing program. In other words, static damage may occur that cannot be felt, seen, or detected through normal testing procedures.

Think of Static As Contamination!

Damage caused by invisible and undetectable events can be understood by comparing ESD damage to medical contamination of the human body by viruses or bacteria. Although viruses and bacteria are invisible, they can cause severe damage even before you can detect their presence. A defense against this invisible threat is sterilization.

As an employee, the hidden threat of electrostatic discharge or ESD should be of great concern to you. ESD damage can significantly reduce your company's profitability. This may affect your profit sharing, your company's ability to compete in the market place and even your employment. Everyone likes to take pride in their work, but without proper ESD controls, your best efforts may be destroyed by static electricity that you can neither feel nor see.

ESD Safe Precision Screwdrivers

Description	Page
Prec. Slotted/Phillips	4-5
Prec. Torx/TorxPlus	6
Prec. Hex Screwdrivers	7
Prec. Nut Drivers	8
Ceramic Slotted/Phillips	9

ESD Safe SYSTEM 4 Handles/Blades & Sets

Description	Page
SYSTEM 4	10-13
Drive-Loc Precision	11

ESD Safe Micro Bit Handles/Bits & Sets

	Description	Page
	Micro Bits	14-16

ESD Safe Drive-Loc VI Handle

	Description	Page
	Drive-Loc VI Handle	20-21

ESD Safe SYS 4 ESD Safe Micro Bit Sets

	Description	Page
	Micro Bit Sets	16

ESD Safe TorqueControl Tools

	Description	Page
	TorqueControl Drivers	22

	Description	Page
	TorqueControl Blades	22

ESD Safe Cushion Grip Bit Holders

	Description	Page
	SoftFinish® Bit Holders	17
	Quick Release Bit Holder	17

ESD Safe Pliers & Cutters Index

	Description	Page
	Diagonal Cutters Tapered Head	23
	Diagonal Cutters Wide Tapered & Oval Head	24-25
	Diagonal Cutters Wide Oval & Wide Form	25
	Oblique Angled Cutters Carbide Edge	26
	End Cutters	27
	Pliers	27-28

ESD Safe Proturn Pliers & Cutters Index

	Description	Page
	Proturn Wire Strippers 30 to 20 AWG	29
	Proturn Pliers Long, Flat, Bent, Round Nose	29-30
	Precision Cutters/Flush Cut 21° & 45° Angle	30-31

ESD Safe Calipers Index

	Description	Page
	Calipers	19

ESD Safe Tweezers Index

	Description	Page
	Tweezers	31-34

Precision ESD Safe Dissipative Drivers

Wiha Precision ESD Static Dissipative Screwdrivers meet the requirements for tools used in static sensitive areas.



ESD Standard IEC 61340-5-1

Rotating cap for precise turning & control with fingertip

Molded Precision handle of impact resistant dissipative material

Tapered handle allows rapid rotation

Blade, CVM steel, hardened, hard chrome finish

Tip, precision ground for exact fit, Wiha Chromtop finish

Surface resistance of handles is 10^6 - 10^9 Ohms



SHOP

27290 Set 8 Pcs. Slotted Precision ESD Safe Dissipative Handle

Blade CVM steel, hardened, hard chrome. Handle impact resistant, dissipative material. In storage pouch. ESD standard IEC 61340-5-1

Item	Slotted mm	Slotted Inch	Slotted mm	Slotted Inch	Phillips mm	Phillips Inch	Size mm	Size Inch	lbs.
27290	27208	.8	40	1.6	120	4.7	.02	10	
	27210	1.0	40	1.6	120	4.7	.02	10	
	27212	1.2	40	1.6	120	4.7	.02	10	
	27215	1.5	40	1.6	120	4.7	.02	10	
	27220	2.0	40	1.6	120	4.7	.02	10	
	27222	2.0	40	1.6	155	6.1	.03	10	
	27223	2.0	40	1.6	180	7.1	.03	10	
	27224	2.0	40	1.6	260	10.2	.04	10	
	27225	2.5	40	2.0	145	5.7	.04	10	
	27227	2.5	40	2.0	195	7.7	.03	10	
	27228	2.5	40	2.0	245	9.6	.04	10	
	27230	3.0	40	2.0	145	5.7	.04	10	
	27232	3.0	40	2.0	210	8.3	.04	10	
	27234	3.0	40	2.0	260	10.2	.05	10	
	27235	3.5	40	2.4	170	6.7	.06	10	
	27237	3.5	40	2.4	210	8.3	.06	10	
	27238	3.5	40	2.4	260	10.2	.06	10	
	27240	4.0	40	2.4	170	6.7	.06	10	
	27242	4.0	40	2.4	210	8.3	.06	10	
	27243	4.0	40	2.4	260	10.2	.07	10	



SHOP

27390 Set 7 Pcs. Slotted & Phillips Precision ESD Safe

Dissipative Handle Blade high alloy CVM steel, hardened, hard chrome. Handle manufactured from impact resistant, dissipative material. ESD standard IEC 61340-5-1

Item	Slotted mm	Slotted Inch	Phillips mm	Phillips Inch	Size mm	Size Inch	lbs.
27390	27215	1.5	40	1.6	27305	00	.40
	27220	2.0	40	1.6	27310	0	.50
	27225	2.5	40	1.6	27320	1	.60
	27235	3.5	40	1.6			

*Metric dimensions actual - Inch dimensions approximate

Precision ESD Safe Slotted/Phillips Drivers

Surface resistance of handles is 10^6 - 10^9 Ohms



273 Phillips Screwdriver, With Precision ESD Safe Dissipative

Handle Blade high alloy chrome-vanadium-molybdenum steel. Hard chrome finished. Handle manufactured from impact resistant, dissipative material. ESD standard IEC 61340-5-1

Item	+	—	—	●	●	—	—	—	—
No.	Size	mm	Inch	mm	Inch	mm	Inch	lbs.	pkg.
27302	000	40	1.6	2.0	.08	120	4.7	.02	10
27305	00	40	1.6	2.0	.08	120	4.7	.02	10
27307	00	75	3.0	2.0	.08	155	6.1	.02	10
27310	0	50	2.0	3.0	.12	145	5.7	.04	10
27312	0	75	3.0	3.0	.12	170	6.7	.03	10
27314	0	100	3.9	3.0	.12	195	7.6	.05	10
27316	0	150	5.9	3.0	.12	245	9.6	.06	10
27320	1	60	2.3	4.0	.16	170	6.7	.06	10
27322	1	75	3.0	4.0	.16	155	6.1	.06	10
27324	1	100	3.9	4.0	.16	210	8.2	.06	10
27326	1	150	5.9	4.0	.16	260	10.2	.07	10

*Metric dimensions actual - Inch dimensions approximate



27399 Set 8 Pcs. Slotted & Phillips Precision ESD Safe

Dissipative Handle Blade high alloy CVM steel, hardened, hard chromed. Handle manufactured from impact resistant, dissipative material. In storage pouch. ESD standard IEC 61340-5-1.

Item	⊕	⊖	⊕	⊖	⊕	⊖
No.	mm	mm	Size mm			Ibs.
27399	27215	1.5	40	27302	000	40
	27220	2.0	40	27305	00	40
	27225	2.5	50	27310	0	50
	27230	3.0	50	27320	1	60



27393 Set 7 Pcs. Extra Long Slotted/Phillips Precision ESD Safe

Dissipative Handle Blade CVM steel, hardened, hard chromed. Handle impact resistant, dissipative material. ESD standard IEC 61340-5-1

Item No.	mm	mm	Size	mm	lbs.
27393	27224	2.0	150	27316	0 150
	27228	2.5	150	27326	1 150
	27234	3.0	150		
	27238	3.5	150		
	27243	4.0	150		



91118 Rugged Polyester Canvas Storage Pouch

Holds 8 Precision Tools up to 170mm in length. Folding pouch.
Has security flaps and velcro closer.

Item	Size	lbs.	pkg.
91118	14 1/2" W x 7 3/4" L	.13	1

Precision ESD Safe TORX® Drivers

Surface resistance of handles is 10^6 - 10^9 Ohms



278 TORX® Screwdriver, With Precision ESD Safe Dissipative

Handle Blade high alloy CVM steel. Hard chrome finished. Handle impact resistant, dissipative material. ESD standard IEC 61340-5-1

Item	Size	mm	Inch	mm	Inch	lbs.	pkg.	SHOP
27801	T1	40	1.6	120	4.7	.03	10	
27802	T2	40	1.6	120	4.7	.03	10	
27803	T3	40	1.6	120	4.7	.03	10	
27804	T4	40	1.6	120	4.7	.03	10	
27805	T5	40	1.6	120	4.7	.03	10	
27811	T6	40	1.6	120	4.7	.03	10	
27817	T7	40	1.6	120	4.7	.03	10	
27823	T8	40	1.6	120	4.7	.03	10	
27829	T9	50	2.0	145	5.7	.04	10	
27835	T10	50	2.0	145	5.7	.04	10	
27841	T15	60	2.4	170	6.7	.07	10	
27847	T20	60	2.4	170	6.7	.07	10	

*Metric dimensions actual - Inch dimensions approximate



ESD standard
IEC 61340-5-1

SHOP

27890 Set 7 Pcs. TORX® Precision ESD Safe Dissipative Handle

Blade high alloy CVM steel, hardened, hard chromed. Handle manufactured from impact resistant, dissipative material.

Item	Size	mm	Size	mm	lbs.	
27890	27804	T4	40	27823	T8	.31
	27805	T5	40	27829	T9	50
	27811	T6	40	27835	T10	50
	27817	T7	40			



ESD standard
IEC 61340-5-1

SHOP

27899 Set 8 Pcs. TORX® Precision ESD Safe Dissipative Handle

Set In Pouch Blade high alloy CVM steel, hardened, hard chromed.

Handle impact resistant, dissipative material.

Item	Size	mm	Size	mm	lbs.	
27899	27801	T1	40	27805	T5	.47
	27802	T2	40	27806	T6	40
	27803	T3	40	27807	T7	40
	27804	T4	40	27920	Chip Lifter	

Precision ESD Safe TORXPlus® Drivers

Surface resistance of handles is 10^6 - 10^9 Ohms



278 TORXPlus® Screwdriver, With Precision ESD Safe Dissipative

Handle Blade high alloy CVM steel, hardened, hard chromed. Handle impact resistant, dissipative material. ESD standard IEC 61340-5-1

Item	Size	mm	Inch	mm	Inch	lbs.	pkg.	SHOP
27850	IP4	40	1.6	120	4.7	.03	10	
27851	IP5	40	1.6	120	4.7	.03	10	
27852	IP6	40	1.6	120	4.7	.03	10	
27853	IP7	40	1.6	120	4.7	.03	10	
27854	IP8	40	1.6	120	4.7	.03	10	
27855	IP9	50	2.0	145	5.7	.04	10	
27856	IP10	50	2.0	145	5.7	.04	10	
27857	IP15	60	2.4	170	6.7	.07	10	

*Metric dimensions actual - Inch dimensions approximate



ESD standard
IEC 61340-5-1

SHOP

27894 Set 7 Pcs. TORXPlus® Precision ESD Safe Dissipative

Handle Blade high alloy CVM steel, hardened, hard chromed.

Item	Size	mm	Size	mm	lbs.	
27894	27851	IP5	40	27855	IP9	.50
	27852	IP6	40	27856	IP10	50
	27853	IP7	40	27857	IP15	60
	27854	IP8	40			

Wiha Precision ESD Safe Hex Drivers

Surface resistance of handles is 10^6 - 10^9 Ohms



275 Metric Hex Driver, With Precision ESD Safe Dissipative

Handle Blade high alloy chrome-vanadium-molybdenum steel.
Hard chrome finished. Handle manufactured from impact resistant, dissipative material. ESD standard IEC 61340-5-1

Item	◆	—	—	—	—	—	—	—	—
No.	mm	mm	Inch	mm	Inch	lbs.	pkg.	SHOP	
27507	.7	40	1.6	120	4.7	.02	10		
27509	.9	40	1.6	120	4.7	.02	10		
27513	1.3	40	1.6	120	4.7	.03	10		
27515	1.5	50	2.0	145	5.7	.03	10		
27520	2.0	50	2.0	145	5.7	.04	10		
27525	2.5	60	2.4	170	6.7	.05	10		
27530	3.0	60	2.4	170	6.7	.05	10		
27535	4.0	60	2.4	170	6.7	.05	10		

*Metric dimensions actual - Inch dimensions approximate



275 Inch Hex Driver, With Precision ESD Safe Dissipative

Handle Blade high alloy chrome-vanadium-molybdenum steel.
Hard chrome finished. Handle manufactured from impact resistant, dissipative material. ESD standard IEC 61340-5-1

Item	◆	—	—	—	—	—	—	—	—
No.	Inch	mm	Inch	mm	Inch	lbs.	pkg.	SHOP	
27505	0.028	40	1.6	120	4.7	.02	10		
27510	0.035	40	1.6	120	4.7	.02	10		
27513	0.05	40	1.6	120	4.7	.02	10		
27537	1/16	50	2.0	145	5.7	.03	10		
27539	5/64	50	2.0	145	5.7	.03	10		
27541	3/32	60	2.4	170	6.7	.04	10		
27543	7/64	60	2.4	170	6.7	.04	10		
27545	1/8	60	2.4	170	6.7	.04	10		
27547	9/64	60	2.4	170	6.7	.05	10		
27549	5/32	60	2.4	170	6.7	.05	10		

*Metric dimensions actual - Inch dimensions approximate



ESD standard
IEC 61340-5-1



27590 Set 8 Pcs. Hex Metric Precision ESD Safe Dissipative

Handle Blade CVM steel, hardened, hard chromed. Handle impact resistant, dissipative material. In storage pouch

Item	◆	—	—	—	—	—	—	—	—
No.	mm	mm	mm	mm	mm	mm	mm	lbs.	
27590	27507	.7	40	27509	.9	40	27513	1.3	40



Item	◆	—	—	—	—	—	—	—	—
No.	mm	mm	mm	mm	mm	mm	mm	lbs.	
27590	27507	.7	40	27520	2.0	50	27530	.53	



27591 Set 8 Pcs. Hex Inch Precision ESD Safe Dissipative

Handle Blade CVM steel, hardened, hard chromed. Handle impact resistant, dissipative material. In storage pouch

Item	◆	—	—	—	—	—	—	—	—
No.	Inch	Inch	Inch	Inch	Inch	Inch	Inch	lbs.	
27591	27513	.050	1.6	27543	7/64	2.4	27547	.57	



91118 Rugged Polyester Canvas Storage Pouch

Holds 8 Precision Tools up to 170mm in length. Folding pouch.
Has security flaps and velcro closer.

Item	◆	—	—	—	—	—	—	—	—
No.	Size	lbs.	pkg.						
91118	14 1/2" W x 7 3/4" L	.13	1						



Wiha Precision ESD Safe Nut Drivers

Surface resistance of handles is 10^6 - 10^9 Ohms



277 Inch Nut Driver, With Precision ESD Safe Dissipative

Handle Blade high alloy chrome-vanadium-molybdenum steel. Hard chrome finished. Handle manufactured from impact resistant, dissipative material. ESD standard IEC 61340-5-1

Item	○	—	—	—	—	—	—	—	—
No.	Inch	mm	Inch	mm	Inch	Inch	Inch	lbs.	pkg.
27701	3/32	60	2.4	155	6.1	.16	.16	.04	10
27703	7/64	60	2.4	155	6.1	.20	.20	.05	10
27705	1/8	60	2.4	155	6.1	.20	.20	.05	10
27707	9/64	60	2.4	155	6.1	.21	.24	.05	10
27709	5/32	60	2.4	155	6.1	.22	.24	.05	10
27711	3/16	60	2.4	155	6.1	.25	.28	.05	10
27713	7/32	60	2.4	170	6.7	.30	.32	.06	10
27715	1/4	60	2.4	170	6.7	.34	.36	.06	10

*Metric dimensions actual - Inch dimensions approximate



ESD standard
IEC 61340-5-1



27791 Set 8 Pcs. Inch Nut Driver Precision ESD Safe Dissipative

Handle Blade CVM steel, hardened, hard chromed. Handle impact resistant, dissipative material. In storage pouch

Item	○	—	—	—	—	—	—	—	—
No.	Inch	mm	Inch	mm	Inch	mm	Inch	lbs.	
27791	27701	3/32	60	2.4	27709	5/32	60	.68	
	27703	7/64	60	2.4	27711	3/16	60		
	27705	1/8	60	2.4	27713	7/32	60		
	27707	9/64	60	2.4	27715	1/4	60		



277 Metric Nut Driver, With Precision ESD Safe Dissipative

Handle Blade high alloy chrome-vanadium-molybdenum steel. Hard chromed finished. Handle manufactured from impact resistant, dissipative material. ESD standard IEC 61340-5-1

Item	○	—	—	—	—	—	—	—	—
No.	mm	mm	Inch	mm	Inch	Inch	Inch	lbs.	pkg.
27720	1.5	60	2.4	140	5.5	2.5	3.0	.03	10
27722	2.0	60	2.4	140	5.5	3.2	4.0	.04	10
27725	2.5	60	2.4	140	5.5	4.0	4.0	.05	10
27730	3.0	60	2.4	155	6.1	5.0	5.0	.06	10
27735	3.5	60	2.4	155	6.1	5.3	6.0	.06	10
27740	4.0	60	2.4	155	6.1	5.5	6.0	.06	10
27745	4.5	60	2.4	155	6.1	6.2	7.0	.05	10
27750	5.0	60	2.4	155	6.1	6.8	7.0	.06	10
27755	5.5	60	2.4	170	6.7	7.6	8.0	.07	10
27760	6.0	60	2.4	170	6.7	9.6	10.0	.06	10

*Metric dimensions actual - Inch dimensions approximate



ESD standard
IEC 61340-5-1



27790 Set 8 Pcs. Metric Nut Driver Precision ESD Safe

Dissipative Handle Blade CVM steel, hardened, hard chromed. Handle impact resistant, dissipative material. In storage pouch

Item	○	—	—	—	—	—	—	—	—
No.	mm	mm	mm	mm	mm	mm	mm	lbs.	
27790	27720	1.5	60	2.4	27735	3.5	60	.63	
	27722	2.0	60	2.4	27740	4.0	60		
	27725	2.5	60	2.4	27750	5.0	60		
	27730	3.0	60	2.4	27755	5.5	60		


[SHOP](#)
28000 ESD Safe Dissipative Precision Handle

Handle with rotating control cap. Surface resistant 10^6 - 10^9 Ohms. 4 mm hex retainer for all SYSTEM 4 interchangeable blades. Tapered handle, high quality plastic, impact resistant. Ball retainer hold. 110mm/4.3" OAL

Item

No. mm Inch mm Inch lbs.

28000 4.0 .1574 14.0 .55 .04


[SHOP](#)
28001 ESD Safe Dissipative Precision Adjustable Handle

- Use in ESD sensitive applications. Surface resistant 10^6 - 10^9 Ohms.
- Collet lock allows for quick & easy adjustment.
- Holds blade securely in place. Accepts all SYSTEM 4 blades. 110mm/4.3" OAL

Item

No. mm Inch mm Inch lbs.

28001 4.0 .1574 14.0 .55 .04


[SHOP](#)
269 SYSTEM 4 Slotted

Reversible Blade High alloy CVM steel, hardened, hard chromed. Wiha vapor Chrome-Top finish on tips.

Item

No. mm mm mm Inch lbs.

26903 1.5 + 3.0 120 4.7 .05

26904 2.0 + 3.5 120 4.7 .05

26905 2.5 + 4.0 120 4.7 .06


[SHOP](#)
269 SYSTEM 4 Combined Slotted/Phillips Reversible Blade

Item

No. mm Size mm Inch lbs.

26971 1.5 + 000 120 4.7 .05

26972 2.0 + 00 120 4.7 .05

26973 3.0 + 0 120 4.7 .05

26974 4.0 + 1 120 4.7 .06


[SHOP](#)
269 SYSTEM 4 Phillips Reversible Blade

Item

No. Size Size mm Inch lbs.

26911 000 + 00 120 4.7 .03

26912 0 + 1 120 4.7 .03

Wiha SYS 4 Precision Handles & Blades

Rotating Cap
for precise turning and control

Tapered Handle
allows rapid rotation,
requires less clearance

Tips
Exact fit,
precision machined

Blades
CVM steel, hardened, hard chromed.
On 4mm Hex shafts

Surface resistance of handles is 10^6 - 10^9 Ohms

Precision Handle
high quality plastic. ESD Safe or Standard styles

15mm
Collet Lock Handle
adjustable blade length from
15 to 95mm/.6" to 3.75"

95mm


[SHOP](#)
280 SYSTEM 4 Metric Ball End Hex

Interchangeable Blade High alloy tool steel, hardened, corrosion protected. Ball end works at 30° angle entry for easy access to fasteners.

Item

No. mm mm Inch lbs. pkg.

28033 1.5 120 4.7 .06 1

28034 2.0 120 4.7 .06 1

28035 2.5 120 4.7 .06 1

28036 3.0 120 4.7 .06 1

28037 4.0 120 4.7 .06 1


[SHOP](#)
280 SYSTEM 4 Inch Ball End Hex

Interchangeable Blade

Item

No. Inch mm Inch lbs.

28021 .050 120 4.7 .06

28023 1/16 120 4.7 .06

28024 5/64 120 4.7 .06

28025 3/32 120 4.7 .06

28026 7/64 120 4.7 .06

28027 1/8 120 4.7 .06

28028 9/64 120 4.7 .06

28029 5/32 120 4.7 .06


[SHOP](#)
269 SYSTEM 4 Metric Hex Sizes,

Interchangeable Blade High alloy CVM steel, hardened, corrosion protected.

Item

No. mm mm Inch lbs.

26913 0.7 120 4.7 .06

26914 0.9 120 4.7 .06

26915 1.3 120 4.7 .06

26916 1.5 120 4.7 .06

26917 2.0 120 4.7 .06

26918 2.5 120 4.7 .06

26919 3.0 120 4.7 .06

26920 4.0 120 4.7 .06


[SHOP](#)
269 SYSTEM 4 Inch Hex Sizes,

Interchangeable Blade

Item

No. Inch mm Inch lbs.

26921 .050 120 4.7 .06

26923 1/16 120 4.7 .06

26924 5/64 120 4.7 .06

26925 3/32 120 4.7 .06

26926 7/64 120 4.7 .06

26927 1/8 120 4.7 .06

26928 9/64 120 4.7 .06

26929 5/32 120 4.7 .06

269 SYS 4 Metric Ball End

& Standard Hex, Reversible Blade

CVM steel, hardened, hard chromed. Wiha vapor Chrome-Top finish on tips. One side hex, other side ballpoint hex.

Item

No. mm mm mm Inch lbs.

26932 1.3 + 1.3 120 4.7 .05

26933 1.5 + 1.5 120 4.7 .05

26934 2.0 + 2.0 120 4.7 .06

26935 2.5 + 2.5 120 4.7 .06

26936 3.0 + 3.0 120 4.7 .06

26937 4.0 + 4.0 120 4.7 .06

**Wiha SYSTEM 4
Precision Blades**

269 SYSTEM 4 Nut Driver Metric,

Interchangeable Blade High alloy chrome-vanadium-molybdenum steel, hardened, corrosion protected. 120mm/4.7" OAL

Item

No. mm mm Inch Inch lbs.

26940 1.5 + 1.8 .12 .12 .03

26941 2.0 + 2.5 .16 .16 .03

26938 1.5 - .11 .11 .04

26939 1.8 - .12 .12 .04

26949 2.0 - .13 .13 .06

26950 2.5 - .16 .16 .06

26942 3.0 - .20 .20 .06

26943 3.2 - .20 .20 .06

26944 3.5 - .22 .24 .06

26945 4.0 - .22 .24 .06

26946 4.5 - .25 .28 .06

26947 5.0 - .27 .28 .06

26948 5.5 - .30 .32 .06


Wiha SYSTEM 4 Drive-Loc Precision Locking Tools

26961 ESD Safe Dissipative Precision Drive-Loc Handle Surface resistant

10^6 - 10^9 Ohms. 4 mm hex retainer for all SYSTEM 4 interchangeable blades. Ball retainer hold. 105mm/4.13" OAL

Item

No. mm mm Inch Inch lbs.

26961 4.0 .1574 23 .91 .08


280 SYSTEM 4 Metric Hex Drive-Loc Reversible Locking Blades

On 4mm Hex blades

Item

No. mm mm lbs.

28003 1.3 + 1.3 .02

28004 1.5 + 1.5 .02

28005 2.0 + 2.0 .02

28006 2.5 + 2.5 .02

28007 3.0 + 3.0 .02

28008 4.0 + 4.0 .02


269 SYSTEM 4 Slotted Drive-Loc Reversible Locking Blades On 4mm Hex

Item

No. mm mm lbs.

26958 1.5 + 3.0 .02

26959 2.0 + 3.5 .02

26960 2.5 + 4.0 .02


280 SYSTEM 4 Metric Nut Drivers Drive-Loc Reversible Locking Blades

On 4mm Hex blades

Item

No. mm mm lbs.

28009 1.5 + 1.8 .02

28010 2.0 + 2.5 .02

28011 3.0 + 3.0 .02

28012 3.2 + 3.2 .02


28013 3.5 + 3.5 .02

28014 4.0 + 4.0 .02

28015 4.5 + 4.5 .02

28016 5.0 + 5.0 .02

28017 5.5 + 5.5 .02

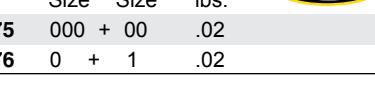
269 SYSTEM 4 Phillips Drive-Loc Reversible Locking Blades On 4mm Hex

Item

No. Size Size lbs.

26975 000 + 00 .02

26976 0 + 1 .02


269 SYSTEM 4 TORX® Drive-Loc Reversible Locking Blades On 4mm Hex

Item

No. Size Size lbs.

26977 T1 + T2 .02

26978 T3 + T4 .02

26979 T5 + T6 .02

26980 T6 + T8 .02

26981 T7 + T9 .02

26982 T10 + T15 .02


26985 12 Piece SYSTEM 4 Precision ESD Drive-Loc Set In storage pouch

Item No.

26985 ESD Safe Drive-Loc Handle

Slotted: 1.5x3.0, 2.0x3.5, 2.5x4.0

lbs. .44

Phillips: 000x00, 0x1

TORX®: T1xT2, T3xT4, T5xT6,

T6xT8, T7xT9, T10xT15



28002 SYSTEM 4 Pozidriv® Drive-Loc Reversible Locking Blades On 4mm Hex

Item

No. Size Size lbs.

28002 0 + 1 .02

Wiha Canvas Pouch Sets


[SHOP](#)

26990 Slotted & Phillips Precision

Interchangeable Blade Set, 4 Pcs. Wiha ESD Safe precision collet lock handle and 3 Wiha interchangeable blades.

26990 Set includes the following blades:
Slotted: 2.0, 3.0, 4.0mm

 Phillips: 00, 0, 1

 Ibs. .17

Surface resistance of handles is 10^6 - 10^9 Ohms

Canvas Pouch

[SHOP](#)

[SHOP](#)
Canvas Pouch
28080 Slotted, Phillips **TORX® & Hex**

Precision Interchangeable Blade Set, 22 Pcs. Wiha ESD Safe precision collet lock handle and 20 Wiha interchangeable blades.

28080 Set includes the following blades:
Slotted: 1.5, 2.0, 3.0, 4.0mm

 Phillips: 000, 00, 0, 1


 TORX®: T3, T4, T5, T6, T7, T8,

T9, T10, T15

Hex: .028, .035

 Ball Hex: .050, 1/16, 5/64, 3/32,
7/64, 1/8, 9/64, 5/32"

ESD Safe Chip Lifter
Ibs. .33

[SHOP](#)

26991 Slotted & Phillips Precision


Interchangeable Blade Set, 6 Pcs. Wiha ESD Safe precision collet lock handle and 5 Wiha interchangeable blades. In canvas pouch.

26991 Set includes the following blades:
Slotted: 1.5, 2.0, 2.5, 3.0, 3.5, 4.0mm

 Phillips: 000, 00, 0, 1

 Ibs. .29

Canvas Pouch

Slotted, Phillips, Hex

[SHOP](#)
26992 Slotted, Phillips and Ball End Hex

Metric/Inch Precision Interchangeable Blade Set, 17 Pcs. Wiha ESD Safe precision collet lock handle and 15 Wiha interchangeable blades.

26992 Set include the following blades:
Slotted: 1.5, 2.0, 3.0, 4.0mm

 Phillips: 000, 00, 0, 1

 Ball End Hex Inch:

.050, 1/16, 5/64, 7/64, 3/32, 1/8"

Ball End Hex Metric:

1.5, 2.0, 2.5, 3.0, 4.0mm

ESD Safe Chip Lifter
Ibs. .63

Canvas Pouch


Slotted, Phillips, Torx® Set In Steel Box



Surface resistance of handles is 10^6 - 10^9 Ohms


[SHOP](#)
28094 Slotted, Phillips & Torx® Precision

Interchangeable Blade Set, 11 Pcs. Wiha ESD Safe precision collet lock handle and 10 Wiha interchangeable blades.


28094 Set includes the following blades:
Slotted: 1.5, 2.0, 3.0, 4.0mm

 Phillips: 000, 00, 0, 1

 TORX®: T3, T4, T5, T6, T7, T8, T9, T10, T15

 Ibs. 1.51


Surface resistance of handles is 10^6 - 10^9 Ohms


[SHOP](#)
26993 Slotted & Phillips Precision

Interchangeable Blade Set, 6 Pcs. Wiha ESD Safe precision collet lock handle and 5 Wiha interchangeable blades.

26993 Set includes the following blades:
Slotted: 1.5, 2.0, 2.5, 3.0, 3.5, 4.0mm

 Phillips: 000, 00, 0, 1

 Ibs. .87



SYSTEM 4 Sets In Compact Fold-Out Box



- ESD Safe Precision Handle
Surface resistance of handles is 10⁶ - 10⁹ Ohms
- High alloy CVM steel, hardened
- Exact fit tips







26996 Slotted & Phillips Precision Interchangeable Blade Set, 5 Pcs. Wiha ESD Safe  precision collet lock handle and 4 Wiha interchangeable blades.

26996 Set includes the following reversible blades in Slotted/Phillips sizes:

- Slotted: 1.5, 2.0, 3.0, 3.5mm
- Phillips: 000, 00, 0, 1

 lbs. .24







26997 Slotted, Phillips and TORX® Precision Interchangeable Blade Set, 9 Pcs. Wiha ESD Safe  Precision Collet Lock handle and 8 Wiha Interchangeable blades.

26997 Set includes the following blades:

- Slotted: 1.5, 2.0, 2.5, 3.0, 3.5, 4.0mm
- Phillips: 000, 00, 0, 1
- TORX®: T6, T7, T8, T9, T10, T15

 lbs. .34







26999 Hex Metric Precision Blade Set, 9 Pcs. Wiha ESD Safe  Precision Collet Lock handle and 8 Wiha interchangeable blades.

26999 Set includes the following blades:

- Hex Metric: .7, .9, 1.3, 1.5, 2.0, 2.5, 3.0, 4.0mm

 lbs. .36







26989 Hex Inch Precision Blade Set, 9 Pcs. Wiha ESD Safe  Precision Collet Lock handle and 8 Wiha interchangeable blades.

26989 Set includes the following blades:

- Hex Inch: .050, 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32"

 lbs. .35







26988 Nut Driver Inch Precision Blade Set, 9 Pcs. Wiha ESD Safe  precision collet lock handle & 8 Wiha interchangeable blades.

26988 Set includes the following blades:

- Nut Driver Inch:

- 3/32, 7/64, 1/8, 9/64, 5/32,
- 3/16, 7/32, 1/4"

 lbs. .39







26998 Nut Driver Metric Precision Blade Set, 9 Pcs. Wiha ESD Safe  precision collet lock handle and 8 Wiha interchangeable blades.

26998 Set includes the following blades:

- Nut Driver Metric:

- 2.0, 2.5, 3.0, 3.2, 3.5, 4.0,
- 4.5, 5.0, 5.5mm

 lbs. .40







26995 TORX® Precision Interchangeable Blade Set, 5 Pcs. Wiha ESD Safe  precision collet lock handle & 4 interchangeable blades.

26995 Set includes the following blades:

- TORX®:

- T6, T7, T8, T9, T10, T15, T20

 lbs. .24







26987 TORX® Precision Interchangeable Blade Set, 8 Pcs. Wiha ESD Safe  precision collet lock handle and 7 interchangeable blades.

26987 Set includes the following blades:

- TORX® Sizes on standard blades:

- T3, T4, T5

- TORX® Sizes on reversible blades:

- T6, T7, T8, T9, T10, T15, T20

 lbs. .33



SYSTEM 4 Handles & Micro Bits

Tips

Exact fit,
precision
machined

Rotating Cap
for precise
turning & control

Tapered Handle
allows rapid rotation,
requires less clearance.
Static Dissipative
 10^6 - 10^9 ohms

Bits CVM steel, hardened

Use bits directly in handle or with 4" bit extension



757 SYSTEM 4 5Point Micro Bits CVM steel, hardened, on 4 mm hex stock.

Item	Size	mm	Inch	lbs.
75743	P1	28	1.1	.01
75744	P2	28	1.1	.01
75745	P3	28	1.1	.01
75746	P4	28	1.1	.01
75747	P5	28	1.1	.01
75748	P6	28	1.1	.01



750 SYSTEM 4 Slotted Bits High alloy CVM steel, hardened, on 4 mm hex stock.

Item	Size	mm	Inch	lbs.
75008	0.8	28	1.1	.01
75012	1.2	28	1.1	.01
75015	1.5	28	1.1	.01
75018	1.8	28	1.1	.01
75020	2.0	28	1.1	.01
75025	2.5	28	1.1	.01
75030	3.0	28	1.1	.01
75035	3.5	28	1.1	.01
75040	4.0	28	1.1	.01



751 SYSTEM 4 Phillips Bits

High alloy chrome-vanadium-molybdenum
steel, hardened, on 4 mm hex stock.

Item	Size	mm	Inch	lbs.
75105	000	28	1.1	.01
75110	00	28	1.1	.01
75115	0	28	1.1	.01
75120	1	28	1.1	.01



753 SYSTEM 4 Hex Metric Bits High alloy

CVM steel, hardened, on 4 mm hex stock.

Item	Size	mm	Inch	lbs.
75307	.7	28	1.1	.01
75309	.9	28	1.1	.01
75313	1.3	28	1.1	.01
75315	1.5	28	1.1	.01
75320	2.0	28	1.1	.01
75325	2.5	28	1.1	.01
75330	3.0	28	1.1	.01
75340	4.0	28	1.1	.01



757 SYSTEM 4 TORX® Bits

High alloy chrome-vanadium-molybdenum
steel, hardened, on 4 mm stock.

Item	Size	mm	Inch	lbs.
75703	T3	28	1.1	.01
75704	T4	28	1.1	.01
75705	T5	28	1.1	.01
75706	T6	28	1.1	.01
75707	T7	28	1.1	.01
75708	T8	28	1.1	.01
75709	T9	28	1.1	.01
75710	T10	28	1.1	.01
75715	T15	28	1.1	.01
75720	T20	28	1.1	.01



753 SYSTEM 4 Hex Inch Bits High alloy

CVM steel, hardened, on 4 mm hex stock.

Item	Size	mm	Inch	lbs.
75307	.028	28	1.1	.01
75309	.035	28	1.1	.01
75313	.050	28	1.1	.01
75350	1/16	28	1.1	.01
75352	5/64	28	1.1	.01
75354	3/32	28	1.1	.01
75356	7/64	28	1.1	.01
75358	1/8	28	1.1	.01
75360	9/64	28	1.1	.01
75340	5/32	28	1.1	.01



753 SYSTEM 4 TORX® Security Bits

High alloy CVM steel, hardened,
on 4 mm stock.

Item	Size	mm	Inch	lbs.
75727	T7s	28	1.1	.01
75728	T8s	28	1.1	.01
75729	T9s	28	1.1	.01
75735	T10s	28	1.1	.01
75739	T15s	28	1.1	.01
75742	T20s	28	1.1	.01



753 SYSTEM 4 Metric Security Hex Bits

High alloy CVM steel, hardened,
on 4 mm hex stock.






Item	Size	mm	Inch	lbs.
75322	2.0	28	1.1	.01
75327	2.5	28	1.1	.01
75332	3.0	28	1.1	.01
75342	4.0	28	1.1	.01



753 SYSTEM 4 Security Hex Inch Bits

High alloy CVM steel, hardened,
on 4 mm hex stock.

Item	Size	mm	Inch	lbs.
75362	5/64	28	1.1	.01
75364	3/32	28	1.1	.01
75366	7/64	28	1.1	.01
75368	1/8	28	1.1	.01
75370	9/64	28	1.1	.01
75372	5/32	28	1.1	.01



Wiha SYSTEM 4 Precision Bit Handle



75801 SYSTEM 4 ESD Safe Dissipative Precision Bit Handle

with rotating control cap. Wiha precision handle, tapered, high quality plastic, impact resistant. **Advantages:**

- For working in ESD sensitive applications Surface resistive 10^6 - 10^9 Ohms
- Ball retainer holds bits securely in place
- Accepts all SYSTEM 4 Series bits
- 110mm/4.3" OAL

Item					
No.	mm	Inch	mm	Inch	lbs.
75801	4.0	.1574	14.0	.55	.06

Wiha SYSTEM 4 Compact Micro Bit Sets



75965 SYSTEM 4 Master Tech ESD & Ratchet With Micro Bits,

65 Pieces In Storage Box. Includes Wiha precision ESD Safe handle, micro bit extension, 72 tooth ratchet & 62 interchangeable micro bits.

Item No. With ESD Precision Handle, 1/4" Ratchet, Micro Bit Extension
75965 Set includes the following micro bits:

- Slotted:** 0.8, 1.2, 1.5, 1.8, 2.0, 2.5, 3.0, 3.5, 4.0mm
- Phillips:** 000, 00, 0, 1
- TORX®:** T3, T4, T5, T6, T7, T8, T9, T10, T15, T20
- Hex Metric:** .7, .9, 1.3, 1.5, 2.0, 2.5, 3.0, 4.0mm
- Hex Inch:** .050, 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32"
- Nut Drivers Metric:** 2.0, 2.5, 3.0, 3.5, 4.0, 4.5, 5.0, 5.5mm
- Nut Drivers Inch:** 5/64, 3/32, 7/64, 1/8, 9/64, 5/32, 3/16, 7/32"
- Pentalobe:** P1, P2, P3, P4, P5, P6
- Magnetic 1/4" to 4mm Adapter

Ibs. 1.16

Micro Bit Extension Blades



75900 Extension Blade For SYSTEM 4 Micro Bits. Shaft CVM steel, hardened, corrosion protected. Ball retainer bit extension for 4 mm bits. Without magnet

Item				
No.	Size	mm	mm	lbs.
75900	4.0	100	4.0	.07



75901 Magnetic Bit Extension Blade For SYSTEM 4 Micro Bits.

Shaft CVM steel, hardened. Magnetic bit holder.

Item				
No.	Size	mm	mm	lbs.
75901	4.0	100	4.0	.04

Wiha SYSTEM 4 Compact Micro Bit Sets

75996 SYSTEM 4 Interchangeable Bit Set,

40 Pcs. In Storage Box.

Set includes Wiha precision handle, non-magnetic bit extension & 38 interchangeable bits.

Item No. SYSTEM 4 Combination Micro Bit Set

75996 Set with ESD Safe Precision Handle

Set includes the following bits:

- Slotted:** 0.8, 1.2, 1.5, 1.8, 2.0, 2.5, 3.0, 3.5, 4.0mm

- Phillips:** 000, 00, 0, 1


- TORX®:** T3, T4, T5, T6, T7, T8, T9, T10, T15

- Hex Metric:** 1.3, 1.5, 2.0, 2.5, 3.0, 4.0mm

- Hex Inch:** .028, .035, .050, 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32"

- 100mm Bit Extension - non-magnetic**

Ibs. 1.04



40 Pcs. Set

Surface resistance of handle is 10^6 - 10^9 Ohms

75990 40 Pc. SYSTEM 4 Interchangeable Bit Set, In Canvas Pouch

Set includes Wiha precision handle, non-magnetic bit extension & 38 interchangeable bits.

Item SYSTEM 4 Combination

No. Micro Bit Set

75990 Set with ESD Safe Precision Handle

Set includes the following bits:

- Slotted:** 0.8, 1.2, 1.5, 1.8, 2.0, 2.5, 3.0, 3.5, 4.0mm

- Phillips:** 000, 00, 0, 1


- TORX®:** T3, T4, T5, T6, T7, T8, T9, T10, T15

- Hex Metric:** 1.3, 1.5, 2.0, 2.5, 3.0, 4.0mm

- Hex Inch:** .028, .035, .050, 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32"

- 100mm Bit Extension - non-magnetic**

Ibs. .65



40 Pcs. Set

Surface resistance of handle is 10^6 - 10^9 Ohms

Micro Bit 1/4" Drive Power Tool Adapter



75902 SYSTEM 4 Micro Bit 1/4" Drive Power Tool Adapter

Shaft CVM steel, hardened, corrosion protected.

1/4" Hex drive holds 4 mm bits. Without magnet

Item SYSTEM 4 Micro Bit 1/4" Drive Power Tool Adapter

No. Size

75902 1/4" 60

mm **Ibs.** .05

Item				
No.	Size	mm	mm	lbs.
75902	1/4"	60	4.0	.05



Wiha SYS 4 Compact Micro Bit Sets

75792 SYSTEM 4 TORX® Precision

Interchangeable Bit Set, 11 Pcs. In Compact

Fold Out Box. Set includes ESD Safe Wiha precision handle, non-magnetic bit extension and 9 Wiha interchangeable bits.

Item ESD Safe SYSTEM 4 TORX®

No. Micro Bit Set

75792 Set with ESD Safe Precision Handle

Sets include the following bits:

- TORX®:** T3, T4, T5, T6, T7, T8, T9, T10, T15

100mm Bit Extension - non-magnetic



lbs. .26

Surface resistance of handle is 10⁶ - 10⁹ Ohms



759 SYSTEM 4 Slotted/Phillips/Hex Inch/

TORX® Precision Interchangeable Bit Set,

27 Pcs. In Compact Fold Out Box.

Sets include your choice of Wiha precision handle, non-magnetic bit extension and 25 Wiha interchangeable bits.

Item Handle Options for SYSTEM 4

No. Combination Bit Sets

75991 Set with Standard Precision Handle

75992 Set with ESD Safe Precision Handle

Sets include the following bits:

- Slotted:** 1.5, 2.0, 3.0, 4.0mm

- Phillips:** 000, 00, 0, 1

- TORX®:** T3, T4, T5,

- T6, T7, T8, T9, T10, T15

- Hex Inch:** .050, 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32"

- 100mm Bit Extension - non-magnetic**

lbs. .34

Surface resistance of handle is 10⁶ - 10⁹ Ohms



75994 SYSTEM 4 Slotted/Phillips/Hex

Metric/TORX® Precision Interchangeable Bit

Set, 27 Pcs. In Compact Fold Out Box.

Set includes Wiha ESD Safe precision handle, non-magnetic bit extension and 25 Wiha interchangeable bits.

Item No. SYSTEM 4 Combination Micro Bit Set

75994 Set with ESD Safe Precision Handle

Sets include the following bits:

- Slotted:** 1.5, 2.0, 3.0, 4.0mm

- Phillips:** 000, 00, 0, 1

- TORX®:**

- T3, T4, T5, T6, T7, T8, T9, T10, T15




- Hex Metric:**

- .7, .9, 1.3, 1.5, 2.0, 2.5, 3.0, 4.0mm

- 100mm Bit Extension - non-magnetic**

lbs. .26

Surface resistance of handle is 10⁶ - 10⁹ Ohms

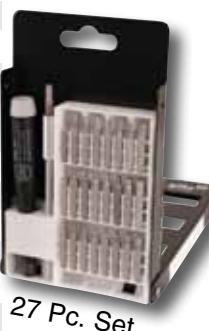

Technicians MicroBit Sets

• Micro Precision Bits on 4mm Hex Drive

Rotation cap

• Bits of Exclusive CRM-72 Tool Steel

Light weight &

• Handle uses non-magnetic ball retainer

compact

• Use bits in extension only

Handle tapered for

• Standard extension adds 4" to length


precise control

• Non-magnetic bit extension

Bits hardened for

• Surface resistance of handles is 10⁶ - 10⁹ Ohms

extreme durability

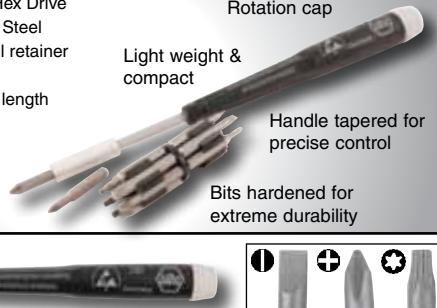

75093 SYSTEM 4 Slotted, Phillips, TORX® Compact ESD

Precision Interchangeable Bit Set, 16 Pcs. Wiha precision handle, bit extension & 14 interchangeable bits.

Item No. Combination Bit Set

75093 Set with ESD Safe Precision Handle

lbs.

- Slotted:** 1.5, 2.0, 2.5, 3.0mm

.17

- Phillips:** 00, 0, 1

- TORX®:** T6, T7, T8, T9, T10, T15, T20

SHOP

- 100mm Bit Extension**

75094 SYSTEM 4 Slotted, Phillips, Hex Inch Compact ESD

Precision Interchangeable Bit Set, 16 Pcs. Wiha precision handle, bit extension & 14 interchangeable bits.

Item No. Combination Bit Set

75094 Set with ESD Safe Precision Handle

lbs.

- Slotted:** 1.5, 2.0, 2.5, 3.0mm

.17

- Phillips:** 00, 0, 1

- Hex Inch:** .035, .050, 1/16, 5/64, 3/32, 7/64, 1/8"

SHOP

- 100mm Bit Extension**

75095 SYSTEM 4 Slotted, Phillips, Hex Metric Compact ESD

Precision Interchangeable Bit Set, 16 Pcs. Wiha precision handle, bit extension & 14 interchangeable bits.

Item No. Combination Bit Set

75095 Set with ESD Safe Precision Handle

lbs.

- Slotted:** 1.5, 2.0, 2.5, 3.0mm

.17

- Phillips:** 00, 0, 1

- Hex Metric:** .9, 1.3, 1.5, 2.0, 2.5, 3.0, 4.0mm

SHOP

- 100mm Bit Extension**

75096 SYSTEM 4 Hex Inch & Metric Compact ESD Precision

Interchangeable Bit Set, 16 Pcs. Wiha precision handle,

bit extension & 14 interchangeable bits.

Item No. Combination Bit Set

75096 Set with ESD Safe Precision Handle

lbs.

- Hex Inch:** 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32"

.17

- Hex Metric:** .9, 1.3, 1.5, 2.0, 2.5, 3.0, 4.0mm

SHOP

- 100mm Bit Extension**

Wiha ESD Safe SoftFinish Cushion Grip Bit Holders



38701 ESD Safe Quick Release 1/4" Bit Holder, With Wiha-SoftFinish® Cushion Grip Handle, IEC 61340-5-1, DIN 3126, ISO 1173
Stainless steel with retaining ring bit holder. Dissipative SoftFinish® cushion grip handle, multi-component, ESD Safe surface resistance 10⁶- 10⁹ Ohm.

Item	Ø	—	—	—	—	—	—	—
No.	Inch	mm	Inch	mm	Inch	lbs.	pkg.	
38701	1/4"	148	5.8	38	1.5	.18	1	



In Durable Pouch

Surface resistance of handle is 10⁶- 10⁹ Ohms

SHOP

38790 ESD Safe 1/4" Quick Release Blade Holder Set With Interchangeable 70mm Blades & Quick Release Blade Holder
20 Pcs. set includes ESD Safe Quick Release Holder, cushion grip handle. 70mm blades are CVM tool steel, hardened. Also includes a Quick Release blade extension.

Item


No. 38790

Slotted: 2.5, 3.0, 3.5, 4.0, 5.5, 6.5mm **Phillips:** 0, 1, 2

TORX®: T6, T7, T8, T9, T10, T15 **Pozidriv®:** 0, 1, 2



Wiha ESD Safe SoftFinish Cushion Grip Screwdrivers

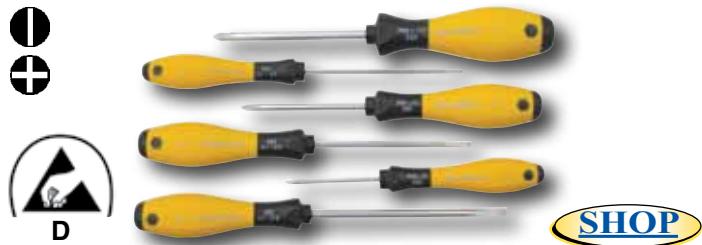

30292 Set 6 Pcs. ESD Safe Slotted & Phillips

DIN EN 61340-5-1/61340-5-2 Round blade, high alloy CVM steel, hardened, hard chromed. Dissipative SoftFinish® cushion grip handle, multi-component, ESD Safe (10⁶-10⁹ Ohm).

Item	⊕	⊖	⊕	⊖	—	⊕	⊖	—	⊕	⊖	—	Size mm	lbs.
No.	mm	Inch	mm	Inch	mm	mm	Inch	mm	mm	Inch	mm	lbs.	
30292	30242*	3.0	.118	100	3.0	1.18	.100	60	31150	0	60	.96	
	30244*	4.0	.157	100	4.0	.157	.100	80	31151	1	80		
	30246*	5.5	.216	125	5.0	.200	.125	100	31152	2	100		

*Cabinet Tips



302 ESD Safe Slotted Screwdrivers, With Wiha-SoftFinish® Handle

DIN EN 61340-5-1/61340-5-2 Round blade, high alloy CVM steel, hardened, hard chromed. Offers protection against electrostatic discharge. Dissipative SoftFinish® cushion grip handle, multi-component, ESD Safe (10⁶-10⁹ Ohm).

Item	⊕	⊖	—	—	⊕	⊖	—	—	⊕	⊖	—	Size mm	lbs.	pkg.
No.	mm	Inch	mm	mm	Inch	lbs.								
30240*	2.5	.098	75	3.0	0.4	.016	175	7.0	.06	10				
30242*	3.0	.118	100	3.9	0.5	.020	204	8.0	.06	10				
30244*	4.0	.157	100	3.9	0.8	.031	211	8.3	.11	10				
30246*	5.5	.216	125	5.0	1.0	.039	236	9.3	.15	10				
30248	6.5	.255	150	5.9	1.2	.047	268	10.6	.22	10				

*Cabinet Tips



311 ESD Safe Phillips Screwdriver, With Wiha-SoftFinish® Handle

DIN EN 61340-5-1/61340-5-2 Round blade, high alloy CVM steel, hardened, hard chromed. Offers protection against electrostatic discharge. Dissipative SoftFinish® cushion grip handle, multi-component, ESD Safe (10⁶-10⁹ Ohm).


Item	⊕	⊖	—	—	⊕	⊖	—	—	⊕	⊖	—	Size mm	lbs.	pkg.
No.	Size	mm	Inch	mm	Inch	mm	Inch	mm	Size	mm	Inch	mm	Inch	lbs.
31150	0	60	2.4	3.0	1/8	164	6.5	.06	10					
31151	1	80	3.1	4.5	3/16	191	7.5	.11	10					
31152	2	100	3.9	6.0	1/4	218	8.6	.20	10					



36289 Set 6 Pcs. ESD Safe TORX® Screwdrivers

Round blade high alloy chrome-vanadium-molybdenum steel, hardened, Hard chrome finish with Wiha-Chromtop satin grip tips. Molded on SoftFinish® cushion grip handle, multi-component.

Item	⊕	⊖	—	—	⊕	⊖	—	—	⊕	⊖	—	Size mm	lbs.	
No.	Size	mm	Inch	mm	Inch	mm	Inch	mm	Size	mm	Inch	mm	Inch	lbs.
36289	36206	T6	60	—	—	—	—	—	36218	T10	80	—	—	.81
	36208	T8	60	—	—	—	—	—	36219	T15	80	—	—	
	36209	T9	60	—	—	—	—	—	36224	T20	100	—	—	

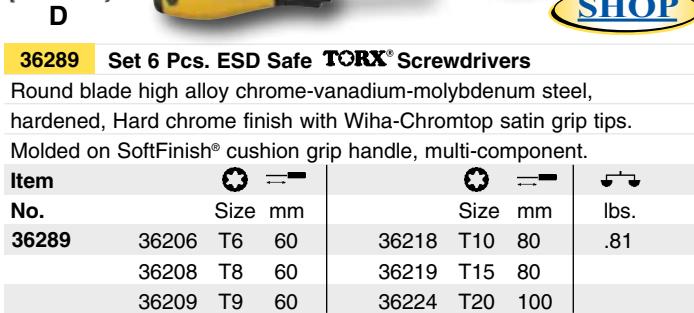

Wiha ESD Safe Interchangeable Sets



Surface resistance of handle is 10^6 - 10^9 Ohms

In Durable Pouch

10891 ESD Safe Slotted & Phillips Interchangeable Blade Set

4 Pc. Set Includes ESD Safe handle & 3 interchangeable blades.

Item

No. 10891 lbs. .65

Slotted: 3.0, 4.0, 6.0mm Phillips: 0, 1, 2



Surface resistance of handle is 10^6 - 10^9 Ohms

In Durable Pouch

10892 ESD Safe Metric Nut Drivers Interchangeable Blade Set

8 Pc. Set Includes ESD Safe handle & 7 interchangeable blades.

Item

No. 10892 lbs. .75

Metric Nut Drivers: 5.0, 5.5, 6.0, 7.0, 8.0, 9.0, 10.0mm



Surface resistance of handle is 10^6 - 10^9 Ohms

In Durable Pouch

10893 ESD Safe TORX® Interchangeable Blade Set

5 Pc. Set Includes ESD Safe handle & 4 interchangeable blades.

Item

No. 10893 lbs. .70

TORX®: T6, T7, T8, T9, T10, T15, T20, T25



Surface resistance of handle is 10^6 - 10^9 Ohms

In Durable Pouch

10895 ESD Safe Interchangeable Combo Blade Set

11 Pc. Set Includes ESD Safe handle & 10 interchangeable blades.

Item

No. 10895 lbs. .75

Slotted: 3.0, 4.0, 6.0mm Phillips: 0, 1, 2

Inch Nut Drivers: 3/16, 1/4, 5/16, 11/32, 3/8, 7/16, 1/2"



Won't damage sensitive parts




Non-metallic high-tech material with 60% fiber glass content, extremely high rigidity.

Thermal stability of the measuring surfaces:
Short-term up to 180°C, continuous 100-120°C

Non-corrosive, non-magnetic, hardly conductive and electrically insulated

Made in Switzerland

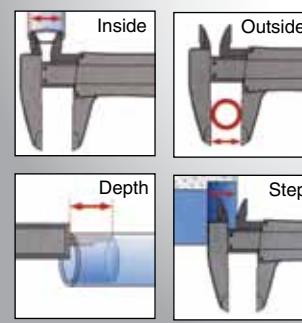

Surface resistance of handle is 10^6 - 10^9 Ohms

ESD Safe Dial Caliper DialMax - Metric/Inch



For working in sensitive electronic components

ESD Standard IEC 61340-5-1

411 ESD Safe Dial Caliper DialMax - Metric & Inch

Non-metallic high-tech material with 60% fiber glass content.

For outside, inside, depth and step measurements.

Impact resistant dial can be recalibrated to zero.

Item	Reading	mm	Inch	Pkg.	wt.
41105	.001"	150	6	Inch	1
41106	0.1mm	150	6	Metric	1



10820 ESD Safe Dissipative Dynamic Handle, Conductive, High Quality Plastic, Impact Resistant. Advantages:

- Accepts all Drive-Loc VI blades
- Surface resistant 10^6 to 10^9 ohms
- Safe for working on ESD sensitive parts
- Collet lock holds blade securely in place

Item	mm	mm	Inch	mm	mm	Inch	lbs.
10820	6.0	135	5.3	15.2	.60	.16	

Wiha Drive-Loc VI Handle & Blades

Drive-Loc mechanism guarantees a secure hold & rapid blade exchange



Adjust interchangeable blades from 40 to 120mm (1.7 to 4.7")

Surface resistance of handle is 10⁶ - 10⁹ Ohms



28486 ESD Safe Drive-Loc VI Cushion Grip Handle

Wiha-SoftFinish® impact resistant, with roll off protection.

Advantages: Ergonomic cushion grip, Drive-Loc mechanism guarantees a secure hold and rapid blade exchange. Static Dissipative.

Item	Ø	—	—	—	—	—
No.	mm	mm	Inch	mm	Inch	lbs.
28486	6.0	115	4.5	36.0	1.41	.21



28105 ESD Safe Drive-Loc VI Cushion Grip Handle

Wiha-SoftFinish® impact resistant, friction hold.

Advantages: Static Dissipative, ideal for use on static sensitive electronic components and equipment. Fits all Drive-Loc blades

Item	Ø	—	—	—	—	—
No.	mm	mm	Inch	mm	Inch	lbs.
28105	6.0	122	4.8	36.0	1.41	.22



Wiha Drive-Loc VI Blades



281 Slotted Drive-Loc VI Interchangeable Blade

High alloy CVM steel, through hardened, hard chrome finish.

Over all blade length 150mm/5.9". Blades fit all Drive-Loc VI handles.

Item	Ø	Ø	—	—	—	—
No.	mm + mm	lbs.	pkg.			
28106	3.5 4.5	.10	1			
28108	5.5 6.5	.10	1			



281 Slotted & Phillips Drive-Loc VI Interchangeable

Blade High alloy CVM steel, through hardened, hard chrome finish.

Over all blade length 150mm/5.9". Blades fit all Drive-Loc VI handles.

Item	Ø	+	—	—	—	—
No.	mm + Size	lbs.	pkg.			
28107	3.0 0	.10	1			
28109	4.0 1	.10	1			
28110	6.0 2	.10	1			



28112 Phillips Drive-Loc VI Interchangeable Blade

High alloy CVM steel, through hardened, hard chrome finish.

Over all blade length 150mm/5.9". Blades fit all Drive-Loc VI handles.

Item	+	+	—	—	—	—
No.	Size + Size	lbs.	pkg.			
28112	1 2	.10	1			



28114 Pozidriv® Drive-Loc VI Interchangeable

Blade High alloy CVM steel, through hardened, hard chrome finish.

Over all blade length 150mm/5.9". Blades fit all Drive-Loc VI handles.

Item	+	+	—	—	—	—
No.	Size + Size	lbs.	pkg.			
28114	1 2	.10	1			



281 TORX® Drive-Loc VI Interchangeable Blade

High alloy CVM steel, through hardened, hard chrome finish.

Over all blade length 150mm/5.9". Blades fit all Drive-Loc VI handles.

Item	*	*	—	—	—	—
No.	Size + Size	lbs.	pkg.			
28126	T6 T8	.10	1			
28127	T7 T9	.10	1			
28128	T10 T15	.10	1			
28129	T20 T25	.10	1			
28130	T30 T40	.10	1			



281 Security TORX® Drive-Loc VI Interchangeable

Blade, high alloy CVM steel, through hardened, hard chrome finish.

Over all blade length 150mm/5.9". Blades fit all Drive-Loc VI handles.

Item	*	*	—	—	—	—
No.	Size + Size	lbs.	pkg.			
28132	T6s T8s	.10	1			
28133	T7s T9s	.10	1			
28134	T10s T15s	.10	1			
28135	T20s T25s	.10	1			
28136	T30s T40s	.10	1			



281 Tri-Wing® Drive-Loc VI Interchangeable Blade

High alloy CVM steel, through hardened, hard chrome finish.

Over all blade length 150mm/5.9". Blades fit all Drive-Loc VI handles.

Item	▲	▲	—	—	—	—
No.	Size + Size	lbs.	pkg.			
28138	0 1	.10	1			
28139	2 3	.10	1			
28140	4 5	.10	1			



Wiha Drive-Loc VI Blades



281 Torq Set® Drive-Loc VI Interchangeable Blade

High alloy CVM steel, through hardened, hard chrome finish.
Over all blade length 150mm/5.9". Blades fit all Drive-Loc VI handles.

Item	⊕	⊕	⊖	⊖	SHOP
No.	Size + Size		lbs.	pkg.	
28142	2	4	.08	1	
28143	6	8	.10	1	



281 Ball End Hex & Hex Metric Drive-Loc VI Interchangeable Blade

High alloy CVM steel, through hardened, hard chrome finish.
Ball end enables the user to work at angles up to 25°. Over all blade length 150mm/5.9". Blades fit all Drive-Loc VI handles.

Item	⊕	⊕	⊖	⊖	SHOP
No.	mm + mm		lbs.	pkg.	
28116	2.5	2.5	.10	1	
28117	3	3	.10	1	
28118	4	4	.10	1	
28119	5	5	.10	1	
28120	6	6	.10	1	



281 Hex Metric Drive-Loc VI Interchangeable Blade

Item	⊕	⊕	⊖	⊖	SHOP
No.	mm + mm		lbs.	pkg.	
28149	2.0	2.5	.09	1	
28150	3.0	4.0	.10	1	
28151	5.0	6.0	.10	1	



281 Hex Inch Drive-Loc VI Interchangeable Blade

High alloy CVM steel, through hardened, hard chrome finish. Over all blade length 150mm/5.9". Blades fit all Drive-Loc VI handles.

Item	⊕	⊕	⊖	⊖	SHOP
No.	Inch + Inch		lbs.	pkg.	
28122	3/32	7/64	.10	1	
28123	1/8	9/64	.10	1	
28124	5/32	3/16	.10	1	



28137 Square Drive-Loc VI Interchangeable Blade

High alloy CVM steel, through hardened, hard chrome finish.
Over all blade length 150mm/5.9". Blades fit all Drive-Loc VI handles.

Item	□	□	⊖	⊖	SHOP
No.	Size + Size		lbs.	pkg.	
28137	1	2	.10	1	



28144 Extension Blade For Drive-Loc VI Blades

High alloy CVM steel, through hardened, hard chrome finish.
OAL blade length 6.5". Blades fit all Drive-Loc VI handles.

Item	○	OAL	lbs.	pkg.	SHOP
No.	mm	OAL	lbs.	pkg.	
28144	6.0	150mm	.14	1	



281 Drive-Loc VI Inch Nut Driver Blades

High alloy CVM steel, through hardened, hard chrome finish.
OAL blade length 150mm/5.9". Blades fit all Drive-Loc VI handles.

Item	○	○	⊖	⊖	SHOP
No.	Inch	mm	lbs.	pkg.	
28156	3/16	150	.11	1	
28157	7/32	150	.11	1	
28158	1/4	150	.11	1	
28159	9/32	150	.12	1	
28160	5/16	150	.13	1	
28161	11/32	150	.14	1	
28162	3/8	150	.15	1	
28163	7/16	150	.17	1	
28164	1/2	150	.18	1	



281 Drive-Loc VI Metric Nut Driver Blades

High alloy CVM steel, through hardened, hard chrome finish.
OAL blade length 150mm/5.9". Blades fit all Drive-Loc VI handles.

Item	○	○	⊖	⊖	SHOP
No.	mm	mm	lbs.	pkg.	
28168	4.0	150	.10	1	
28169	4.5	150	.10	1	
28170	5.0	150	.11	1	
28171	5.5	150	.11	1	
28172	6.0	150	.12	1	
28173	7.0	150	.13	1	
28174	8.0	150	.13	1	
28177	9.0	150	.14	1	
28175	10.0	150	.15	1	
28176	11.0	150	.20	1	



Includes Certificate



285 ESD Safe TorqueVario-S Newton Meter, With Window Scale

EN ISO 6798, BS EN 26789, ASME B107.14M, +/- 10% Accuracy

Ergonomic multi-component handle, light and compact. Handle sizes proportioned to optimize torque range. Audible and perceptible click when torque setting has been attained. With Certificate of accuracy.

Item	Range	Nm	mm	Inch	lbs.	pkg.	SHOP
No.		Nm	mm	Inch	lbs.	pkg.	
28500	.04 - .46	124	4.875"	.30	1		

ESD TorqueVario handle has unique serial number and certificate of calibration



288 ESD Safe 5Point Interchangeable Blades For TorqueVario-S

Newton Meter Handle tip blades on narrow 5/32 Hex shafts.

High alloy CVM steel, hardened, hard chromed.

Item	○	⊖	⊖	⊖	⊖	SHOP
No.	Size	mm	mm	lbs.	pkg.	
28818	PS1	175	4.0	.06	1	



ESD Safe Adjustable TorqueControl Tools



Includes Certificate

[SHOP](#)

285 ESD Safe TorqueVario-S, With Window Scale

EN ISO 6798, BS EN 26789, ASME B107.14M, +/- 6% Accuracy
Ergonomic multi-component handle, light and compact. Handle sizes proportioned to optimize torque range. Audible and perceptible click when torque setting has been attained. With Certificate of accuracy.

Item Range

No.	Inch lbs.	Increments	mm	lbs.	pkg.	Repeatable
28522*	15 - 80(in/oz)	2.5	Inch oz	122 - 127	.33	1
28524	5 - 10	.2	Inch lbs	122 - 127	.34	1
28526	7.5 - 20	.5	Inch lbs	126 - 131	.42	1

Surface resistance of handles is 10^6 - 10^9 Ohms

Each TorqueVario handle has unique serial number and certificate of calibration



28882 ESD Safe Bit Holder Adapter For 1/4" Drive Bits Shaft CVM
steel, hardened, corrosion protected. (Not for use in Insulated handles)

Item

No.	Size	mm	mm	lbs.	pkg.
28882	1/4	162	4.0	.09	1

[SHOP](#)



With Certificate
of Calibration
+/- 6%

[SHOP](#)

28591 Set 24 Pcs. ESD Safe Adjustable TorqueVario-S Bit Set

Certified to EN ISO 6798, BS EN 26789, ASME B107.14M. Set includes ergonomic multi-component adjustable TorqueVario-S handle, 21 Micro Bits, non-magnetic Micro Bit holder and Torque adjustment tool, packed in a compact durable storage box.

Item No.

28591	Slotted: 1.5, 2.0, 3.0, 4.0mm Phillips: #00, #0, #1 TORX®: T6, T7, T8, T9, T10, T15 Hex Inch: .050, 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32"	lbs. 1.31
28524	Handle ESD Safe Range 5 - 10 Inch lbs.	

Surface resistance of handle is 10^6 - 10^9 Ohms

28592 Set 24 Pcs. ESD Safe Adjustable TorqueVario-S Bit Set

Certified to EN ISO 6798, BS EN 26789, ASME B107.14M.

Item No.

28592	Slotted: 1.5, 2.0, 3.0, 4.0mm Phillips: #00, #0, #1 TORX®: T6, T7, T8, T9, T10, T15 Hex Inch: .050, 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32"	lbs. 1.31
28526	Handle ESD Safe Range 7.5 - 20 Inch lbs.	

Surface resistance of handle is 10^6 - 10^9 Ohms



288 ESD Safe Slotted Interchangeable Blades For TorqueVario-S

Slotted tip blades on narrow 5/32 Hex shafts. High alloy chrome-vanadium-molybdenum steel, hardened, satin hard chrome finish.

Item	Slotted	Phillips	TORX®	Hex	Max. Torque	lbs.	Nm	pkg.
28801	1.5	.059		175	.07		0.15	1
28803	2.0	.078		175	.07		0.4	1
28805	3.0	.118		175	.07		0.6	1
28807	3.5	.139		175	.07		1.1	1
28809	4.0	.157		175	.07		2.5	1

[SHOP](#)



288 ESD Safe Phillips Interchangeable Blades For TorqueVario-S

Phillips tip blades on narrow 5/32 Hex shafts. High alloy chrome-vanadium-molybdenum steel, hardened, satin hard chrome finish.

Item	Slotted	Phillips	TORX®	Hex	Max. Torque	lbs.	Nm	pkg.
28810	000	175	4.0		.07		0.4	1
28812	00	175	4.0		.07		0.4	1
28814	0	175	4.0		.07		0.9	1
28816	1	175	4.0		.07		3.8	1

[SHOP](#)



288 ESD Safe TORX® Interchangeable Blades For TorqueVario-S

TORX® tip blades on narrow 5/32 Hex shafts. High alloy chrome-vanadium-molybdenum steel, hardened, hard chromed.

Item	Slotted	Phillips	TORX®	Hex	Max. Torque	lbs.	Nm	pkg.
28825	T5	175	4.0		.07		0.4	1
28826	T6	175	4.0		.07		0.6	1
28827	T7	175	4.0		.07		0.9	1
28828	T8	175	4.0		.07		1.3	1
28829	T9	175	4.0		.07		2.5	1
28830	T10	175	4.0		.07		3.8	1

[SHOP](#)



Surface resistance of handle is 10^6 - 10^9 Ohms

With Certificate of Calibration +/- 10%

[SHOP](#)

Item No.

28890	Slotted: 1.5, 2.0, 3.0, 4.0mm Phillips: #00, #0, #1 TORX®: T6, T7, T8, T9, T10, T15 Hex Inch: .050, 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32"	lbs. 1.33
28522	Handle ESD Safe Range 15-80 Inch/oz.	


Surface resistance of handle is 10^6 - 10^9 Ohms

Wiha ESD Safe Pliers & Cutters

 Surface resistance of handles is 10^6 - 10^9 Ohms

Precision Cutters Tapered Head

Semi Flush

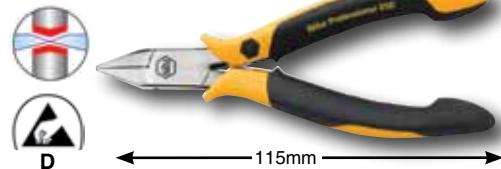

32703 Precision Cutters, Small Tapered Head, Semi Flush

Cutters drop-forged for an ideal material structure. Precise aligned cutting edges are additionally induction hardened at a hardness of Approx. 64°HRC. Two component non-slip soft grip handle, ESD Safe Dissipative. ESD standard IEC 61340-5-1

	mm	Inch	Copper	Head Wdth	Pkg.	wt.
32703	115	4.5	1.0	9.5mm	1	.19


Precision Cutters Tapered Head

Flush

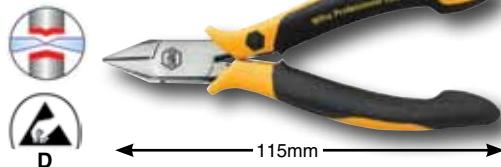
32705 Precision Cutters, Small Tapered Head, Flush

Cutters drop-forged for an ideal material structure. Precise aligned cutting edges are additionally induction hardened at a hardness of Approx. 64°HRC. Two component non-slip soft grip handle, ESD Safe Dissipative. ESD standard IEC 61340-5-1

	mm	Inch	Copper	Head Wdth	Pkg.	wt.
32705	115	4.5	1.0	9.5mm	1	.19


Precision Cutters Tapered Head

Semi Flush


32702 Precision Cutters, Small Tapered Head With Hollow Ground Back, Semi Flush

Cutters drop-forged for an ideal material structure. Precise aligned cutting edges are additionally induction hardened at a hardness of Approx. 64°HRC. Two component non-slip soft grip handle, ESD Safe Dissipative. ESD standard IEC 61340-5-1

	mm	Inch	Copper	Head Wdth	Pkg.	wt.
32702	115	4.5	1.0	9.5mm	1	.19


Precision Cutters Tapered Head

Flush


32704 Precision Cutters, Small Tapered Head With Hollow Ground Back, Flush

Cutters drop-forged for an ideal material structure. Precise aligned cutting edges are additionally induction hardened at a hardness of Approx. 64°HRC. Two component non-slip soft grip handle, ESD Safe Dissipative. ESD standard IEC 61340-5-1

	mm	Inch	Copper	Head Wdth	Pkg.	wt.
32704	115	4.5	1.0	9.5mm	1	.19



Wiha ESD Safe Pliers & Cutters

Precision Cutters Wide Tapered Head

Bevel



D 115mm



32706 Precision Cutters, Wide Tapered Head, Bevel

Cutters drop-forged for an ideal material structure. Precise aligned cutting edges are additionally induction hardened at a hardness of Approx. 64°HRC. Two component non-slip soft grip handle, ESD Safe Dissipative. ESD standard IEC 61340-5-1

	mm	Inch	Copper	Head Wdth	Pkg.	wt.
32706	115	4.5	1.4	11.0mm	1	.20

Surface resistance of handles is 10^6 - 10^9 Ohms


[SHOP](#)

Precision Cutters Wide Tapered Head

Flush



D 115mm



32708 Precision Cutters, Wide Tapered Head, Flush

Cutters drop-forged for an ideal material structure. Precise aligned cutting edges are additionally induction hardened at a hardness of Approx. 64°HRC. Two component non-slip soft grip handle, ESD Safe Dissipative. ESD standard IEC 61340-5-1

	mm	Inch	Copper	Head Wdth	Pkg.	wt.
32708	115	4.5	1.2	11.0mm	1	.19

Surface resistance of handles is 10^6 - 10^9 Ohms


[SHOP](#)

Precision Cutters Wide Tapered Head

Full Flush



D 115mm



32710 Precision Cutters, Wide Tapered Head, Full Flush

Cutters drop-forged for an ideal material structure. Precise aligned cutting edges are additionally induction hardened at a hardness of Approx. 64°HRC. Two component non-slip soft grip handle, ESD Safe Dissipative. ESD standard IEC 61340-5-1

	mm	Inch	Copper	Head Wdth	Pkg.	wt.
32710	115	4.5	1.0	11.0mm	1	.23

Surface resistance of handles is 10^6 - 10^9 Ohms


[SHOP](#)

Precision Cutters Wide Tapered Head

Flush



D 115mm



32711 Precision Cutters, Wide Tapered Head With Wire Trapping Device, Flush

Cutters drop-forged for an ideal material structure. Precise aligned cutting edges are additionally induction hardened at a hardness of Approx. 64°HRC. Two component non-slip soft grip handle, ESD Safe Dissipative. ESD standard IEC 61340-5-1

	mm	Inch	Copper	Head Wdth	Pkg.	wt.
32711	115	4.5	1.2	11.0mm	1	.19

Surface resistance of handles is 10^6 - 10^9 Ohms


[SHOP](#)

Precision Cutters Slim Oval Form

Flush



D 115mm



32712 Precision Cutters, Slim Oval Head, Flush

Cutters drop-forged for an ideal material structure. Precise aligned cutting edges are additionally induction hardened at a hardness of Approx. 64°HRC. Two component non-slip soft grip handle, ESD Safe Dissipative. ESD standard IEC 61340-5-1

	mm	Inch	Copper	Head Wdth	Pkg.	wt.
32712	115	4.5	1.0	10.5mm	1	.23


Surface resistance of handles is 10^6 - 10^9 Ohms

[SHOP](#)

Wiha ESD Safe Pliers & Cutters

Precision Cutters Slim Oval Form

Full Flush



32714 Precision Cutters, Slim Oval Head, Full Flush

Cutters drop-forged for an ideal material structure. Precise aligned cutting edges are additionally induction hardened at a hardness of Approx. 64°HRC. Two component non-slip soft grip handle, ESD Safe Dissipative. ESD standard IEC 61340-5-1

	mm	Inch	Copper	Head Wdth	Pkg.	wt.
32714	115	4.5	1.0	10.0mm	1	.23

Surface resistance of handles is 10^6 - 10^9 Ohms



Precision Cutters Slim Oval Form

Bevel



32716 Precision Cutters, Wide Oval Head, Bevel

Cutters drop-forged for an ideal material structure. Precise aligned cutting edges are additionally induction hardened at a hardness of Approx. 64°HRC. Two component non-slip soft grip handle, ESD Safe Dissipative. ESD standard IEC 61340-5-1

	mm	Inch	Copper	Head Wdth	Pkg.	wt.
32716	115	4.5	1.4	11.0mm	1	.19

Surface resistance of handles is 10^6 - 10^9 Ohms



Precision Cutters Wide Oval Form And Carbide Edge

Bevel



32718 Precision Cutters, Wide Oval Head Carbide

Cutting Edges, Bevel

Cutters drop-forged for an ideal material structure. Precise aligned carbide cutting edge. Two component non-slip soft grip handle, ESD Safe Dissipative. ESD standard IEC 61340-5-1


	mm	Inch	Copper	Head Wdth	Pkg.	wt.
32718	110	4 3/8	1.6	11.0mm	1	.20

Surface resistance of handles is 10^6 - 10^9 Ohms



Precision Cutters Wide Oval Form

Flush



32720 Precision Cutters, Wide Oval Head, Flush

Cutters drop-forged for an ideal material structure. Precise aligned cutting edges are additionally induction hardened at a hardness of Approx. 64°HRC. Two component non-slip soft grip handle, ESD Safe Dissipative. ESD standard IEC 61340-5-1

	mm	Inch	Copper	Head Wdth	Pkg.	wt.
32720	115	4.5	1.2	11.0mm	1	.19

Surface resistance of handles is 10^6 - 10^9 Ohms



Precision Cutters Wide Oval Form

Flush



32721 Precision Cutters, Wide Oval Head With Wire

Trapping Device, Flush

Cutters drop-forged for an ideal material structure. Precise aligned cutting edges are additionally induction hardened at a hardness of Approx. 64°HRC. Two component non-slip soft grip handle, ESD Safe Dissipative. ESD standard IEC 61340-5-1

	mm	Inch	Copper	Head Wdth	Pkg.	wt.
32721	115	4.5	1.2	11.0mm	1	.23

Surface resistance of handles is 10^6 - 10^9 Ohms



Wiha ESD Safe Pliers & Cutters

Oblique Angled Cutters

Flush



32722 Oblique Angled Cutters, 29°, Flush

Oblique Cutters drop-forged for an ideal material structure. Precise aligned cutting edges are additionally induction hardened at a hardness of Approx. 64°HRC. Two component non-slip soft grip handle, ESD Safe Dissipative. ESD standard IEC 61340-5-1

	mm	Inch	Copper	Head Wdth	Pkg.	wt.
32722	115	4.5	1.2	12.0mm	1	.24

Surface resistance of handles is 10⁶ - 10⁹ Ohms

Oblique Angled Cutters

Ultra Full Flush



32724 Oblique Angled Cutters, 29°, Full Flush

Oblique Cutters drop-forged for an ideal material structure. Precise aligned cutting edges are additionally induction hardened at a hardness of Approx. 64°HRC. Two component non-slip soft grip handle, ESD Safe Dissipative. ESD standard IEC 61340-5-1

	mm	Inch	Copper	Head Wdth	Pkg.	wt.
32724	115	4.5	1.0	12.0mm	1	.24

Surface resistance of handles is 10⁶ - 10⁹ Ohms

Oblique Angled Cutters

Semi Flush



32726 Oblique Angled Cutters, 29°, Short Head, Semi Flush


Oblique Cutters drop-forged for an ideal material structure. Precise aligned cutting edges are additionally induction hardened at a hardness of Approx. 64°HRC. Two component non-slip soft grip handle, ESD Safe Dissipative. ESD standard IEC 61340-5-1

	mm	Inch	Copper	Head Wdth	Pkg.	wt.
32726	115	4.5	1.2	12.0mm	1	.24

Surface resistance of handles is 10⁶ - 10⁹ Ohms

Oblique Front Cutters

Flush



32728 Oblique Front Cutters, Very Small Head, 40°, Flush

Oblique Cutters drop-forged for an ideal material structure. Precise aligned cutting edges are additionally induction hardened at a hardness of Approx. 64°HRC. Two component non-slip soft grip handle, ESD Safe Dissipative. ESD standard IEC 61340-5-1

	mm	Inch	Copper	Head Wdth	Pkg.	wt.
32728	130	5.1	0.8	8.5mm	1	.21

Surface resistance of handles is 10⁶ - 10⁹ Ohms

ESD Safe Tool Set In Canvas Pouch



32793 11 Pc. Set, 4 ESD Safe Pliers, Slotted & Phillips

Screwdrivers Pliers drop-forged for an ideal material structure. Two component non-slip soft grip handle. ESD standard IEC 61340-5-1

32793 11 piece ESD Safe Pliers & Slotted/Phillips Precision Drivers

Set in custom case includes:

ESD Safe Pliers & Cutters

4.5" Tapered Flush Cutters 4.5" Snipe Nose Pliers

4.375" Oblique Cutters 5.7" Long Nose Pliers

ESD Safe Precision Screwdrivers

Slotted 2.0 x 40mm Phillips #00 x 40mm

Slotted 2.5 x 50mm Phillips #0 x 50mm

Slotted 3.0 x 50mm Phillips #1 x 60mm



Slotted 3.5 x 60mm

lbs. 2.43

Surface resistance of handles is 10⁶ - 10⁹ Ohms

Wiha ESD Safe Pliers & Cutters
End Cutters Extra Slim

Semi Flush

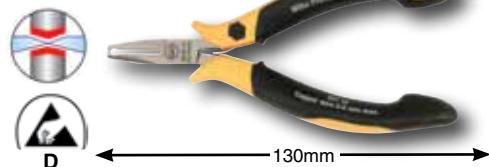
32732 End Cutters, Extra Slim, Semi Flush

End Cutters drop-forged for an ideal material structure. Precise aligned cutting edges are additionally induction hardened at a hardness of Approx. 64HRC. Two component non-slip soft grip handle, ESD Safe Dissipative. ESD standard IEC 61340-5-1

	mm	Inch	Copper	Tip Wdth	Pkg.	wt.
32732	130	5.1	0.6	4.1mm	1	.16

Surface resistance of handles is 10^6 - 10^9 Ohms

End Cutters Wide Head

Flush


32734 End Cutters, Wide Head, Flush


End Cutters drop-forged for an ideal material structure. Precise aligned cutting edges are additionally induction hardened at a hardness of Approx. 64HRC. Two component non-slip soft grip handle, ESD Safe Dissipative. ESD standard IEC 61340-5-1

	mm	Inch	Copper	Head Wdth	Pkg.	wt.
32734	115	4.5	1.4	11.0mm	1	.18

Surface resistance of handles is 10^6 - 10^9 Ohms

ESD Safe Pliers

Short Snipe Nose


32742 ESD Safe Pliers, Short Snipe Nose (Chain Nose) Straight, Serrated Jaws


Pliers drop-forged for an ideal material structure. Precisely aligned, jaws, hardened. Two component non-slip soft grip handle, ESD Safe Dissipative. ESD standard IEC 61340-5-1

	mm	Inch	Head Wdth	Pkg.	wt.
32742	120	4 3/4	9.5mm	1	.20

Surface resistance of handles is 10^6 - 10^9 Ohms

ESD Safe Pliers

Bent Snipe Nose 45°


32744 ESD Safe Pliers, Snipe Nose (Chain Nose)
Bent 45°, Smooth Jaws


Pliers drop-forged for an ideal material structure. Precisely aligned, jaws, hardened. Two component non-slip soft grip handle, ESD Safe Dissipative. ESD standard IEC 61340-5-1

	mm	Inch	Head Wdth	Pkg.	wt.
32744	120	4 3/4	9.5mm	1	.20

Surface resistance of handles is 10^6 - 10^9 Ohms

ESD Safe Pliers

Long Needle Nose


32746 ESD Safe Pliers, Long Needle Nose Pliers, Straight, Serrated Jaws

Pliers drop-forged for an ideal material structure. Precisely aligned, jaws, hardened. Two component non-slip soft grip handle, ESD Safe Dissipative. ESD standard IEC 61340-5-1


	mm	Inch	Head Wdth	Pkg.	wt.
32746	145	5 3/4	12.0mm	1	.27

Surface resistance of handles is 10^6 - 10^9 Ohms

Wiha ESD Safe Pliers & Cutters

ESD Safe Pliers

Needle Nose, Bent 90°

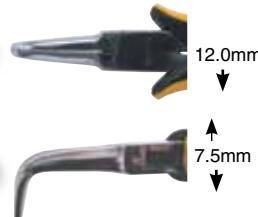

32748 ESD Safe Pliers, Needle Nose Pliers, Bent 90°, Smooth Jaws

Pliers drop-forged for an ideal material structure. Precisely aligned, jaws, hardened. Two component non-slip soft grip handle, ESD Safe Dissipative. ESD standard IEC 61340-5-1



	mm	Inch	Head Wdth	Pkg.	wt.
32748	145	5 3/4	12.0mm	1	.21

Surface resistance of handles is 10^6 - 10^9 Ohms



ESD Safe Pliers

Short Round Nose Pliers

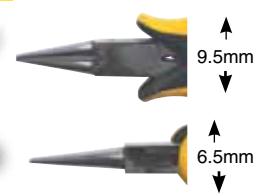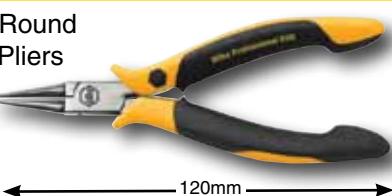

32750 ESD Safe Pliers, Short Round Nose Pliers, Smooth Jaws

Pliers drop-forged for an ideal material structure. Precisely aligned, jaws, hardened. Two component non-slip soft grip handle, ESD Safe Dissipative. ESD standard IEC 61340-5-1


	mm	Inch	Head Wdth	Pkg.	wt.
32750	120	4 3/4	9.5mm	1	.17

Surface resistance of handles is 10^6 - 10^9 Ohms



ESD Safe Pliers

Short Flat Nose Pliers

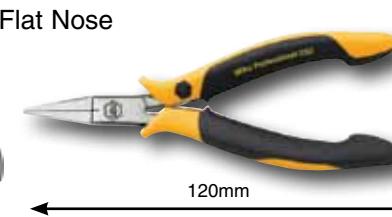

32752 ESD Safe Pliers, Short Flat Nose Pliers, Smooth Jaws

Pliers drop-forged for an ideal material structure. Precisely aligned, jaws, hardened. Two component non-slip soft grip handle, ESD Safe Dissipative. ESD standard IEC 61340-5-1

	mm	Inch	Head Wdth	Pkg.	wt.
32752	120	4 3/4	9.5mm	1	.16

Surface resistance of handles is 10^6 - 10^9 Ohms



ESD standard
IEC 61340-5-1



Surface
resistance
of handles
is 10^6 - 10^9
Ohms



ESD standard
IEC 61340-5-1

32790 4 Piece ESD Safe Pliers Set In Custom Case

Pliers drop-forged for an ideal material structure.

Two component non-slip soft grip handle. ESD Safe Dissipative.

32790 4 piece ESD Safe Pliers Set Includes:

4.5" Wide Oval Side Cutters

5.75" Long Nose Pliers

4.75" Flat Nose Pliers

4.375" Oblique Front Cutters

lbs. 2.06

Surface resistance of handles is 10^6 - 10^9 Ohms



32791 11 Pc. Set, 4 ESD Safe Pliers, SYSTEM 4 Slotted & Phillips 5 Pc. Set & 2 ESD Safe Tweezers Pliers drop-forged for an ideal material structure. Two component non-slip soft grip handle. ESD Safe Precision handle & 4 CVM tool steel blades. Tweezers anti-static conductive, ESD Safe Hypo allergenic, anti-magnetic stainless.

32791 11 piece ESD Safe Pliers, Tweezers & SYS 4 precision Set in custom case includes:

ESD Safe Pliers & Cutters

4.5" Wide Oval Side Cutters

5.75" Long Nose Pliers

4.75" Flat Nose Pliers

4.375" Oblique Front Cutters

SYSTEM 4 Set in separate pouch

ESD Safe Conductive Precision Handle

Slotted: 1.5, 2.0, 3.0 & 4.0

Phillips: 000, 00, 0 & 1

ESD Safe Tweezers: 44501 AA SA ESD & 44510 7a SA ESD

lbs. 2.43



Wiha ESD Safe Proturn Pliers & Cutters

proturn



Glare free black finish

Hardened steel return spring


Surface resistance of handles is 10^6 - 10^9 Ohms

Tested ESD Safe handle with non-slip soft grip surface, protects the hand and reduces manual effort & user fatigue

ESD standard IEC 61340-5-1

 D

ESD Safe Wire Stripper



45810 Proturn ESD Safe Wire Stripper


ESD standard IEC 61340-5-1. C70 special tool steel. Glare free, black finish. ESD Safe handle with non-slip grips.

Strips 0.2, 0.3, 0.4, 0.5, 0.6, 0.8mm

45810	mm	Inch	Strips	AWG	A	B	C	Pkg.	wt.
	165	6.5	30 to 20	30mm	12mm	4mm	1	.25	



ESD Safe Long Nose Pliers




45811 Proturn ESD Safe Long Nose Pliers

ESD standard IEC 61340-5-1. C70 special tool steel. Glare free, black finish. ESD Safe handle with non-slip grips.

45811	mm	Inch	A	B	C	Pkg.	wt.
	160	6.3	2mm	30mm	3mm	1	.18



ESD Safe Flat Nose Pliers




45812 Proturn ESD Safe Flat Nose Pliers

ESD standard IEC 61340-5-1. C70 special tool steel. Glare free, black finish. ESD Safe handle with non-slip grips.

45812	mm	Inch	A	B	C	Pkg.	wt.
	160	6.3	2mm	32mm	3mm	1	.18



ESD Safe Bent Nose Pliers




45813 Proturn ESD Safe Bent Nose Pliers

ESD standard IEC 61340-5-1. C70 special tool steel. Glare free, black finish. ESD Safe handle with non-slip grips.

45813	mm	Inch	A	B	C	Pkg.	wt.
	152	6.0	2mm	30mm	4mm	1	.18




Wiha ESD Safe Proturn Pliers & CuttersSurface resistance of handles is 10^6 - 10^9 Ohms**ESD Safe Round Nose Pliers****45814 Proturn ESD Safe Round Nose Pliers**

ESD standard IEC 61340-5-1. C70 special tool steel.

Glare free, black finish. ESD Safe handle with non-slip grips.


45814	mm	Inch	A	B	C	Pkg.	wt.
	152	6.0	2mm	22mm	3mm	1	.17

SHOP**ESD Safe Diagonal Cutter****45820 Proturn ESD Safe 21° Precision Cutters/Flush Cut**

ESD standard IEC 61340-5-1. C70 special tool steel.

Glare free, black finish. ESD Safe handle with non-slip grips.


45820	mm	Inch	AWG	A	B	C	Pkg.	wt.
	127	5.0	18/1mm	13mm	12mm	3mm	1	.16

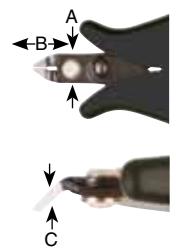SHOP**ESD Safe Diagonal Cutter****45821 Proturn ESD Safe 45° Precision Cutters/Flush Cut**

ESD standard IEC 61340-5-1. C70 special tool steel.

Glare free, black finish. ESD Safe handle with non-slip grips.


45821	mm	Inch	AWG	A	B	C	Pkg.	wt.
	127	5.0	18/1mm	10mm	9mm	2mm	1	.14

SHOP**ESD Safe Diagonal Cutter****45822 Proturn ESD Safe 21° Precision Cutters/Flush Cut**

ESD standard IEC 61340-5-1. C70 special tool steel.


Glare free, black finish. ESD Safe handle with non-slip grips.

45822	mm	Inch	AWG	A	B	C	Pkg.	wt.
	140	5.5	16/1.3mm	13mm	12mm	3mm	1	.15

SHOP**ESD Safe Diagonal Cutter****45823 Proturn ESD Safe 21° Precision Cutters/Flush Cut**

ESD standard IEC 61340-5-1. C70 special tool steel. Glare free, black finish. ESD Safe handle with non-slip grips.

45823	mm	Inch	AWG	A	B	C	Pkg.	wt.
	133	5.25	14/1.6mm	10mm	10mm	2mm	1	.14

SHOP**ESD Safe Diagonal Cutter****45824 Proturn ESD Safe 45° Precision Cutters/Flush Cut**

ESD standard IEC 61340-5-1. C70 special tool steel. Glare free, black finish. ESD Safe handle with non-slip grips.

45824	mm	Inch	AWG	A	B	C	Pkg.	wt.
	140	5.5	14/1.6mm	13mm	12mm	2.5mm	1	.16

SHOP

Wiha ESD Safe Proturn Pliers & Cutters

Surface resistance of handles is 10^6 - 10^9 Ohms

proturn



Surface
resistance
of handles
is 10^6 - 10^9
Ohms



ESD standard
IEC 61340-5-1

45890 26 Pc. Set, Proturn ESD Safe Pliers, Precision Slotted & Phillips Screwdrivers, Precision Micro Bit Set & ESD Safe Tweezers
ESD Proturn Pliers glare free, black finish, ESD Safe non-slip soft grips. ESD Safe Precision Slotted & Phillips screwdrivers, CVM tool steel blades. Precision ESD Safe Micro Bit handle holds Micro Bit extension and 4mm Micro bits. Anti-static Tweezer conductive, ESD Safe Hypo allergenic, anti-magnetic stainless.

45890 26 Piece ESD Safe Pliers, Precision Screwdrivers, Micro Bit Set & ESD Tweezer In Custom Case Includes:

ESD Safe Proturn Strippers, Pliers & Cutters

45810 6.5" Wire Stripper 45811 6.3" Long Nose Pliers

45813 6.0" Bent Nose Pliers 45823 5.25" 21° Precision Cutters

ESD Safe Slotted & Phillips Precision Screwdrivers

Slotted: 2.0, 2.5, 3.0mm Phillips: 0, 1

ESD Micro Bit Handle, Micro Bit Extension & 14 Micro Bits 4mm

Hex: .71, .89, 1.27, 1.5, 2.0, 2.5, 3.0 Torx: T4, T5, T6, T7, T8, T9, T10

ESD Safe Tweezer: 44532 00 SA ESD - 120mm Heavy Duty Strong, Tapered To Strong Point.

lbs. 2.05



Professional Quality ESD Tweezers

ESD SAFE • STATIC DISSIPATIVE • HYPO ALLERGENIC COATED • TEXTURED GRIPPING SURFACE

Surface resistance is 10^6 - 10^9 Ohms



Universal Fine Point Tweezers

Item No.	Description	wt.	SHOP
44501	AA SA ESD - 130mm	.09	

Static dissipative, ESD Safe hypo allergenic tweezers made from Vommaloy. Special stainless steel, anti-magnetic and acid resistant.



Reduced Body To Medium Point

Item No.	Description	wt.	SHOP
44504	2 SA ESD - 120mm	.08	

Static dissipative, ESD Safe hypo allergenic tweezers made from Vommaloy. Special stainless steel, anti-magnetic and acid resistant.



Sturdy Long, Fine Round Points

Item No.	Description	wt.	SHOP
44502	GG SA ESD - 130mm	.09	

Static dissipative, ESD Safe hypo allergenic tweezers made from Vommaloy. Special stainless steel, anti-magnetic and acid resistant.



Flat Round Tip Smooth Sides

Item No.	Description	wt.	SHOP
44505	2a SA ESD - 120mm	.08	

Static dissipative, ESD Safe hypo allergenic tweezers made from Vommaloy. Special stainless steel, anti-magnetic and acid resistant.



Long Narrow Body Low Force

Item No.	Description	wt.	SHOP
44503	SS SA ESD - 135mm	.08	

Static dissipative, ESD Safe hypo allergenic tweezers made from Vommaloy. Special stainless steel, anti-magnetic and acid resistant.



Fine Round Points For Assembly

Item No.	Description	wt.	SHOP
44506	3 SA ESD - 120mm	.08	

Static dissipative, ESD Safe hypo allergenic tweezers made from Vommaloy. Special stainless steel, anti-magnetic and acid resistant.



Wiha Professional Quality ESD Safe Tweezers

Surface resistance is 10^6 - 10^9 Ohms



Fine Round Points Shorter

Item No.	Description	wt.	SHOP
44507	3c SA ESD - 110mm	.08	SHOP

Static dissipative, ESD Safe hypo allergenic tweezers made from Vommaloy. Special stainless steel, anti-magnetic and acid resistant.



Very Fine Points/Tapered To Tip

Item No.	Description	wt.	SHOP
44508	4 SA ESD - 110mm	.08	SHOP

Static dissipative, ESD Safe hypo allergenic tweezers made from Vommaloy. Special stainless steel, anti-magnetic and acid resistant.



Extra Fine Points/Tapered To Tip

Item No.	Description	wt.	SHOP
44509	5 SA ESD - 110mm	.08	SHOP

Static dissipative, ESD Safe hypo allergenic tweezers made from Vommaloy. Special stainless steel, anti-magnetic and acid resistant.



Curved Extra Fine Rounded Tips

Item No.	Description	wt.	SHOP
44510	7a SA ESD - 120mm	.08	SHOP

Static dissipative, ESD Safe hypo allergenic tweezers made from Vommaloy. Special stainless steel, anti-magnetic and acid resistant.



Holds 0.8 to 2mm Diameter

Item No.	Description	wt.	SHOP
44511	50 SA ESD - 120mm	.08	SHOP

Static dissipative, ESD Safe hypo allergenic tweezers made from Vommaloy. Special stainless steel, anti-magnetic and acid resistant.



Holds 1.5 to 3mm Diameter

Item No.	Description	wt.	SHOP
44512	51 SA ESD - 130mm	.08	SHOP

Static dissipative, ESD Safe hypo allergenic tweezers made from Vommaloy. Special stainless steel, anti-magnetic and acid resistant.



Holds 3.5 to 7mm Diameter

Item No.	Description	wt.	SHOP
44513	52 SA ESD - 120mm	.08	SHOP

Static dissipative, ESD Safe hypo allergenic tweezers made from Vommaloy. Special stainless steel, anti-magnetic and acid resistant.



Holds 6.5 to 10mm Diameter

Item No.	Description	wt.	SHOP
44514	53 SA ESD - 120mm	.08	SHOP

Static dissipative, ESD Safe hypo allergenic tweezers made from Vommaloy. Special stainless steel, anti-magnetic and acid resistant.



Angled 3.5 to 7mm Diameter

Item No.	Description	wt.	SHOP
44515	54 SA ESD - 120mm	.08	SHOP

Static dissipative, ESD Safe hypo allergenic tweezers made from Vommaloy. Special stainless steel, anti-magnetic and acid resistant.



Narrow Rounded Tip Serrated, Guide Pin

Item No.	Description	wt.	SHOP
44518	22 SA ESD - 150mm	.10	SHOP

Static dissipative, ESD Safe hypo allergenic tweezers made from Vommaloy. Special stainless steel, anti-magnetic and acid resistant.



Universal Blunt Tip Serrated

Item No.	Description	wt.	SHOP
44520	40 SA ESD - 145mm	.11	SHOP

Static dissipative, ESD Safe hypo allergenic tweezers made from Vommaloy. Special stainless steel, anti-magnetic and acid resistant.



MicroTip 45° Hook 1x1x2mm

Item No.	Description	wt.	SHOP
44521	12 SA-SMD ESD - 120mm	.09	SHOP

Static dissipative, ESD Safe hypo allergenic tweezers made from Vommaloy. Special stainless steel, anti-magnetic and acid resistant.

Wiha Professional Quality ESD Safe Tweezers

Surface resistance is 10^6 - 10^9 Ohms 



MicroTip For Chips Angled 1.6 x 1 x 1mm

Item No.	Description	wt.	SHOP
44522	13 SA ESD - 120mm	.08	

Static dissipative, ESD Safe hypo allergenic tweezers made from Vommaloy. Special stainless steel, anti-magnetic and acid resistant.



Long Rounded to 1.0mm Wide No Serration

Item No.	Description	wt.	SHOP
44523	PSF SA ESD - 125mm	.09	

Static dissipative, ESD Safe hypo allergenic tweezers made from Vommaloy. Special stainless steel, anti-magnetic and acid resistant.



Flat Bent 35°, 3mm Diameter Grip

Item No.	Description	wt.	SHOP
44524	58 SA-SMD ESD - 117mm	.08	

Static dissipative, ESD Safe hypo allergenic tweezers made from Vommaloy. Special stainless steel, anti-magnetic and acid resistant.



Curved Extra Fine, 3mm Long Straight Tip

Item No.	Description	wt.	SHOP
44525	7abb SA ESD - 120mm	.08	

Static dissipative, ESD Safe hypo allergenic tweezers made from Vommaloy. Special stainless steel, anti-magnetic and acid resistant.



Narrow Body Low Force Bent 35°-3mm Tip

Item No.	Description	wt.	SHOP
44526	SSbb SA ESD - 140mm	.08	

Static dissipative, ESD Safe hypo allergenic tweezers made from Vommaloy. Special stainless steel, anti-magnetic and acid resistant.



Angled Extra Fine Points Bent 30°, 3mm Long Tips

Item No.	Description	wt.	SHOP
44527	5abb SA ESD - 117mm	.08	

Static dissipative, ESD Safe hypo allergenic tweezers made from Vommaloy. Special stainless steel, anti-magnetic and acid resistant.



Extra Fine Points Bent 30°, 3mm Long Tips

Item No.	Description	wt.	SHOP
44528	5bb SA ESD - 107mm	.08	

Static dissipative, ESD Safe hypo allergenic tweezers made from Vommaloy. Special stainless steel, anti-magnetic and acid resistant.



MicroTip Bent 30° 1.6mm

Item No.	Description	wt.	SHOP
44529	8b SA ESD - 120mm	.08	

Static dissipative, ESD Safe hypo allergenic tweezers made from Vommaloy. Special stainless steel, anti-magnetic and acid resistant.



Flat Bent 35°, 2mm Diameter Grip Radius

Item No.	Description	wt.	SHOP
44530	59 SA-SMD ESD - 117mm	.08	

Static dissipative, ESD Safe hypo allergenic tweezers made from Vommaloy. Special stainless steel, anti-magnetic and acid resistant.



ESD Safe General Purpose Fine Point

Item No.	Description	wt.	SHOP
44531	1 SA ESD - 120mm	.08	

Static dissipative, ESD Safe hypo allergenic tweezers made from Vommaloy. Special stainless steel, anti-magnetic and acid resistant.



Heavy Duty Strong Tweezers Tapered To Strong Point

Item No.	Description	wt.	SHOP
44532	00 SA ESD - 120mm	.09	

Static dissipative, ESD Safe hypo allergenic tweezers made from Vommaloy. Special stainless steel, anti-magnetic and acid resistant.



Angled & Slightly Bent With Extra Fine Tips

Item No.	Description	wt.	SHOP
44533	7 SA ESD - 120mm	.08	

Static dissipative, ESD Safe hypo allergenic tweezers made from Vommaloy. Special stainless steel, anti-magnetic and acid resistant.



Wiha Professional Quality ESD Safe Tweezers

Surface resistance is 10^6 - 10^9 Ohms



MicroTip 30° Bend & 0.5mm Slot Milled

Item No.	Description	wt.
55531	11SA-SMD ESD - 117mm	.08
Static dissipative, ESD Safe hypo allergenic tweezers made from Vommaloy. Special stainless steel, anti-magnetic and acid resistant.		



Narrow Body, Bent, Long Guide Pin, Serrated

Item No.	Description	wt.
55532	22b SA ESD - 155mm	.10
Static dissipative, ESD Safe hypo allergenic tweezers made from Vommaloy. Special stainless steel, anti-magnetic and acid resistant.		



Blunt Tips - 1.0mm Wide Serrated

Item No.	Description	wt.
55533	PSF SA ESD - 125mm	.09
Static dissipative, ESD Safe hypo allergenic tweezers made from Vommaloy. Special stainless steel, anti-magnetic and acid resistant.		



Flat and Broad Tips 3mm Wide

Item No.	Description	wt.
55534	F SA ESD - 120mm	.08
Static dissipative, ESD Safe hypo allergenic tweezers made from Vommaloy. Special stainless steel, anti-magnetic and acid resistant.		



MicroTip Straight & 0.5mm Slot Milled

Item No.	Description	wt.
55535	8ab SA-SMD ESD - 120mm	.08
Static dissipative, ESD Safe hypo allergenic tweezers made from Vommaloy. Special stainless steel, anti-magnetic and acid resistant.		



MicroTip 30° Bent & Angled With 0.5 Slot

Item No.	Description	wt.
55536	19 SA-SMD ESD - 120mm	.08
Static dissipative, ESD Safe hypo allergenic tweezers made from Vommaloy. Special stainless steel, anti-magnetic and acid resistant.		



Chip Holding Curved Fine MicroTip

Item No.	Description	wt.
55537	R10 SA ESD - 117mm	.07
Static dissipative, ESD Safe hypo allergenic tweezers made from Vommaloy. Special stainless steel, anti-magnetic and acid resistant.		



Very Fine Points 40° Tapered To Tip

Item No.	Description	wt.
55539	4b SA ESD - 110mm	.08
Static dissipative, ESD Safe hypo allergenic tweezers made from Vommaloy. Special stainless steel, anti-magnetic and acid resistant.		



Wafer Tweezer

Item No.	Description	wt.
55538	72a SA ESD -	.07
Static dissipative, ESD Safe hypo allergenic tweezers made from Vommaloy. Special stainless steel, anti-magnetic and acid resistant.		



9mm Wide With Back Stop Pins - Wafer

Item No.	Description	wt.
55546	89 SA ESD - 125mm	.08
Static dissipative, ESD Safe hypo allergenic tweezers made from Vommaloy. Special stainless steel, anti-magnetic and acid resistant.		



Angled 12mm Wide Flat, Back Stop - Wafer

Item No.	Description	wt.
55547	91 SA ESD - 125mm	.08
Static dissipative, ESD Safe hypo allergenic tweezers made from Vommaloy. Special stainless steel, anti-magnetic and acid resistant.		



**WIHA – WINNER OF THE
MX AWARD 2014.
GERMANY'S BEST SME.**



wiha
Tools that work for you



(800) 494-6104
fax: (800) 494-7456
cservice@wihatools.com
www.wihatools.com

Catalog Item No. 99945.wo
version - 4/1/15

**Subject to change
without notice**

**©2015 Willi Hahn
Corporation**

®Torx is a registered trademark of
Acument Intellectual Properties LLC.




Wiha Quality Tools

1348 Dundas Circle
Monticello, MN 55362
tel: 763.295.6591
fax: 763.295.6598


Wiha Tools Canada Ltd.

www.wihatools.ca
Brampton, ONT L6T 4X4
tel: 866.494.0096 or 763.295.6591
fax: 763.295.6598

To:

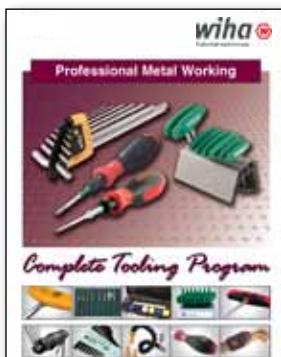


91330.wo - Tooling Catalog

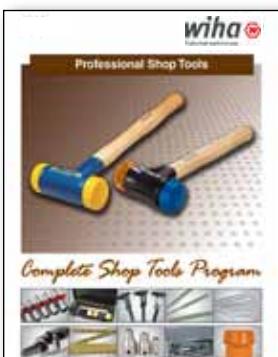

99004.wo - Shop Tools Catalog



99914.wo - TORX Catalog

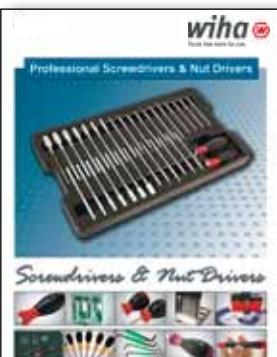

99002.wo - Screwdrivers Catalog



99919.wo - Insulated Catalog



99001.wo - TorqueControl Catalog




99934.wo - Hex Tools Catalog



99951.wo - Bits Catalog



99977.wo - Pliers/Crimpers Catalog

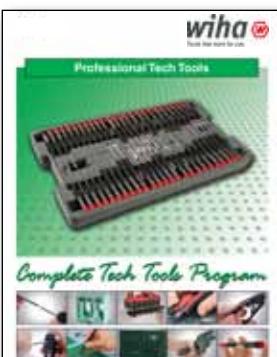

99006.wo - Tech Tools Catalog