SHEET OF

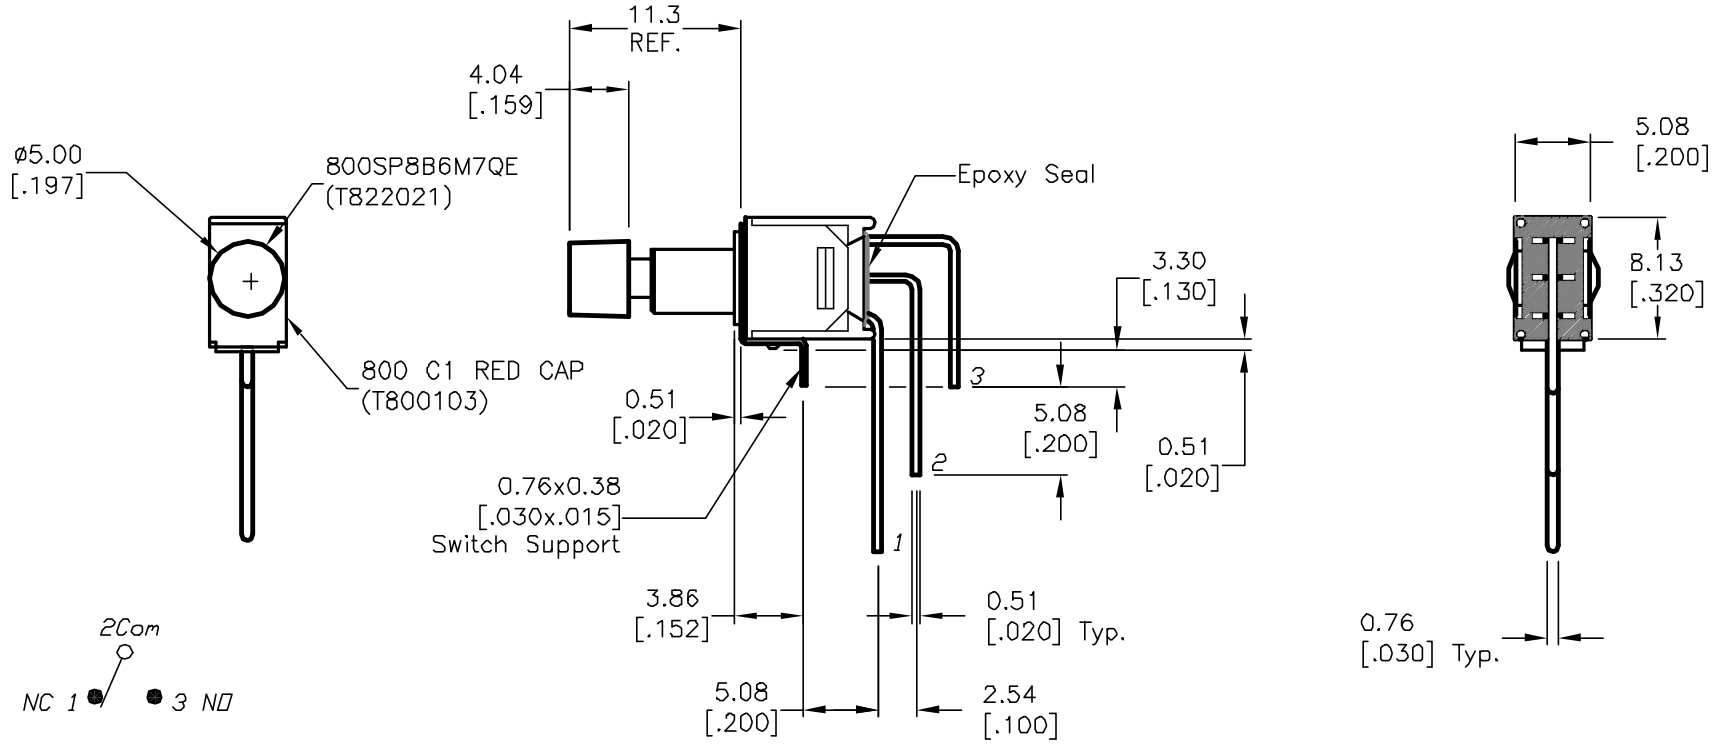

CIRCUIT: SPDT
CONTACT CONFIGURATION

ON	(ON)
2-1	2-3

( )=Momentary

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
   X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 3A @120VAC or 28VDC;
   1A @250VAC.
5. FIXED TERM. MOVING CONTACT:
   Silver plated Copper alloy
6. ELECTRICAL LIFE: 60,000 make-and-break cycle at full load.
7. DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
8. OPERATING TEMP.: -30°C to 85°C

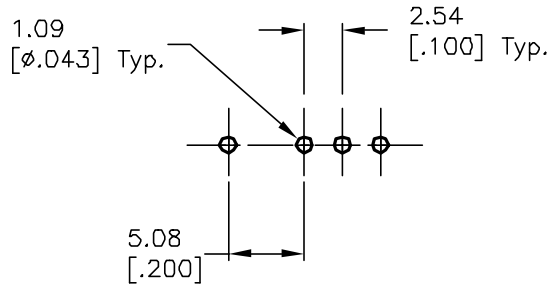

RECOMMEND P.C.B. LAYOUT

REV.	ECN No.	DESCRIPTION	DATE	CHKD
A	12338	RELEASED FOR PRODUCTION		

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

TITLE				
800 SP-8 B6 M7 Q E/C1 RED				
SCALE 2:1	DATE 9/14/99	DR MM	DWG XT0102P	REV A